

ONE SURFACE
MANY POSSIBILITIES

POLISHED
VITRIFIED TILES



Kajaria

Kajaria



Aerial view of virat nagar plant, (Rajasthan)



Only tile company
in India to be conferred with
“superbrand” for the twelfth
times in a row.



Awarded Asia's
Most promising brand.



Certified member of
Indian Green Building
Council

WE PURSUED EXCELLENCE, LEADERSHIP FOLLOWED

Kajaria Ceramics is the largest manufacturer of Ceramic and Vitrified tiles in India. It has an annual capacity of 70.40 mn. sq. meters, distributed across eight plants.

The motivating factor remains the zeal to be the best, to be at the top and to achieve the highest echelons of excellence.

The manufacturing units are equipped with cutting edge technology. Intense automation, robotic car application and a zero chance for human errors are just few reasons why Kajaria remains at the top in the industry.

The best in providing tile solutions, Kajaria has since then grown stronger with its hard work, innovation and patronage from our discerning customers.

AWARDS & ACCOLADES

- ISO 9001:2008 Certification for Implementing a Quality Management System.
- ISO 14001 Certification for Implementing an Environmental Management System.
- ISO 22000:2005 Certification for Implementing a Food Safety Management System.
- ISO 50001:2011 Certification for Establishing, Implementing, Maintaining and Improving an Energy Management System.
- SA 8000 Certification for Implementing Social Accounting Standards.



Kajaria
POLISHED
VITRIFIED TILES

ONE SURFACE
MANY POSSIBILITIES

INDEX



SOLITAIRE PLUS (DOUBLE CHARGE)
80X160 CM 06-15

SOLITAIRE PLUS (FULL BODY)
80X160 CM 16-25

SOLITAIRE PLUS
100X100 CM 26-35

SOLITAIRE
80X80 CM 36-45

TROPICANA
80X80 CM 46-49

SAPPHIRE
60X120 CM 50-61

TERRAZZO
60x120 CM 62-67

STEPSTONE (STEP)
30x120 CM 68-75

STEPSTONE (RISER)
20X120 CM 68-75

STONEGRES PLUS
60X120 CM 76-81

STONEGRES NEO
60X60 CM 82-87

STONEGRES
60X60 CM 88-91

AMAZON
60X60 CM 92-95

SANDUNE
60X60 CM 96-99

STONE ART
60X60 CM 100-105

DOUBLE CHARGE
60X60 CM 106-1111

CLASSIC
60X60 CM 112-113

ELEGANT SOLUBLE SALT
60X60 CM 114-119

DURATECH-XT
60X60 CM 120-127

DURATECH
40X40 CM 128-137

DURATECH
30X60 CM 138-153

DURATECH CLADDING
30X45 CM 154-163





Solitaire Plus

800x1600 MM

Ideal for Urban Choice

Kajaria introduces Solitaire Plus 800x1600mm double charge tiles in high gloss super sheen nano surface. Emanating a breathtaking visual impact of a space, Solitaire Plus slabs are aesthetically pleasing and its grandeur and bold look demonstrate its utility and splendour.

The Solitaire Plus double charge tiles provide stain resistance and easy maintenance.

Double Charge Polished Vitrified Tiles



Solitaire Plus

800x1600MM

Double Charge Polished Vitrified Tiles

Super Glossy



K-16801



K-16802

Kajaria



Solitaire Plus

800x1600MM

Double Charge Polished Vitrified Tiles

Super Glossy



K-16803



K-16804

Solitaire Plus

800x1600MM

Double Charge Polished Vitrified Tiles

Super Glossy



K-16805



K-16806

Kajaria




Solitaire Plus

800x1600MM

Double Charge Polished Vitrified Tiles

Super Glossy

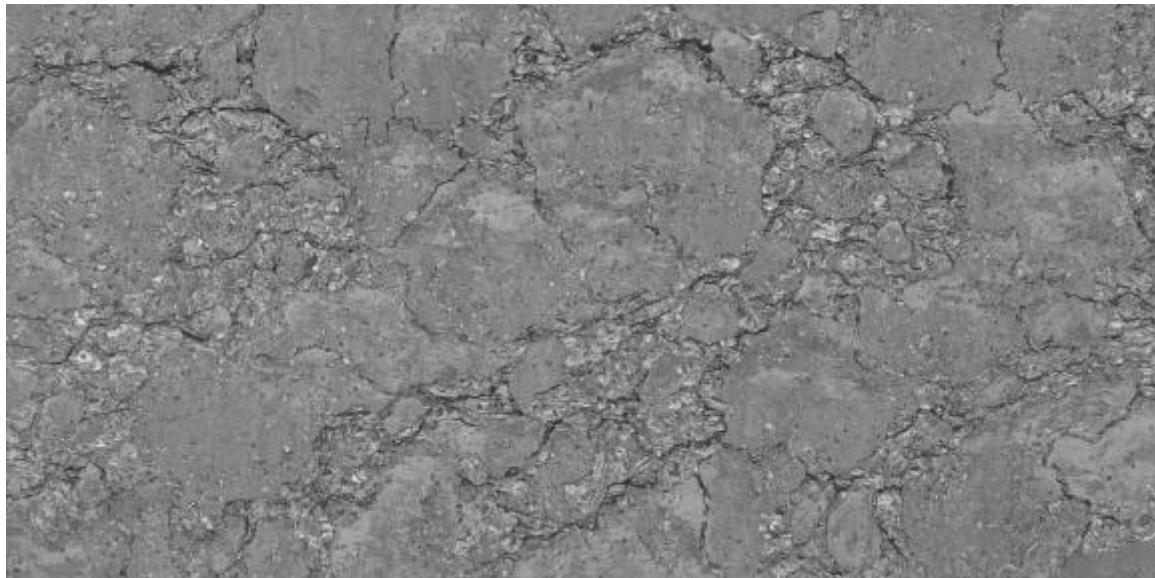

K-16807




K-16808

Solitaire Plus

800x1600MM

Double Charge Polished Vitrified Tiles

Super Glossy

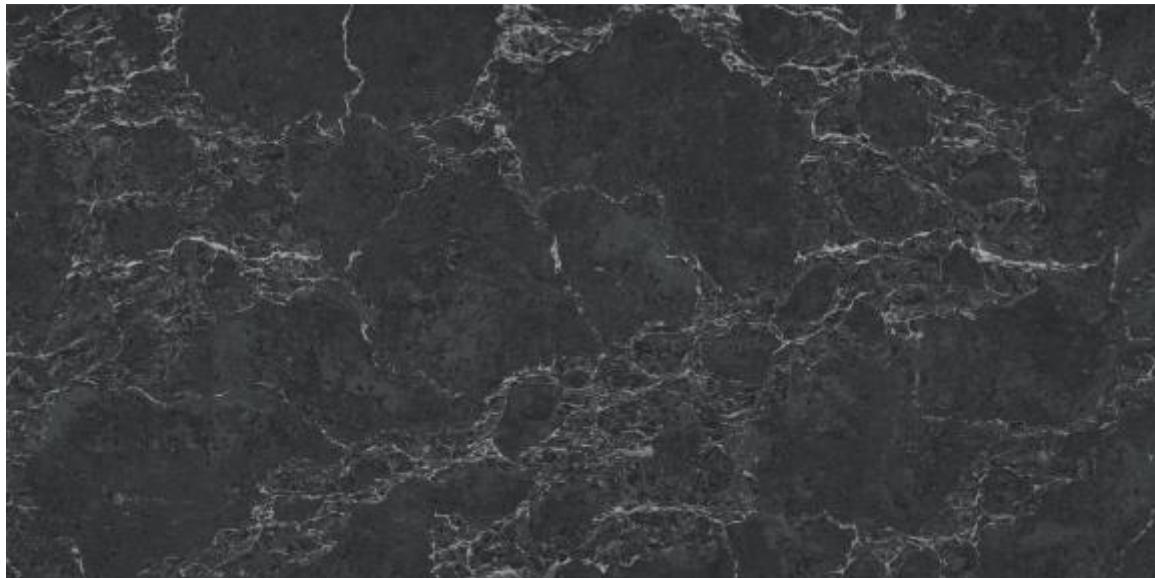

K-16809



K-16810

Kajaria





Kajaria

Solitaire Plus

800x1600 MM

**FULL
BODY**

Ideal for
Urban Choice

Kajaria introduces Solitaire Plus - FULL BODY Tiles in size of 800x1600mm which is a revolution in the Polished Vitrified Tiles product category. Serving as an ideal solution to numerous applications, Adding to its reliability, these slabs have close to almost 0% water absorption (<0.05%) which ensures the surface remains 100% moisture free, evading the growth of bacteria and fungus. The Solitaire Plus full body tiles provide stain resistance and easy maintenance.

Full Body
Vitrified Tiles | Polished | Matt








Solitaire Plus

800x1600MM


Full Body Vitrified Tiles

Polished/Matt

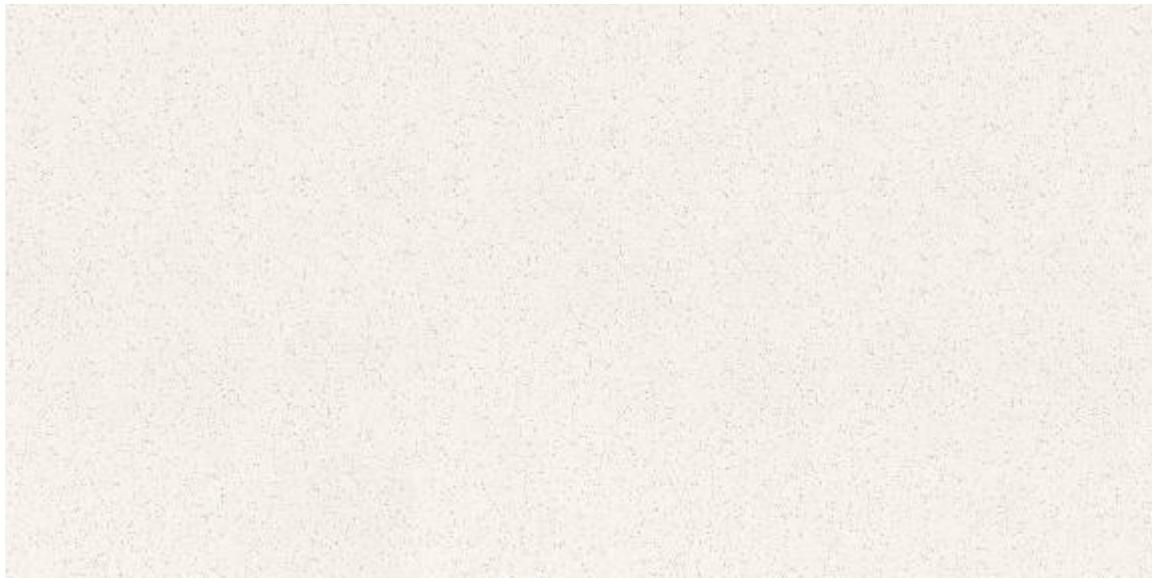

K-16851

MATT | GLOSSY

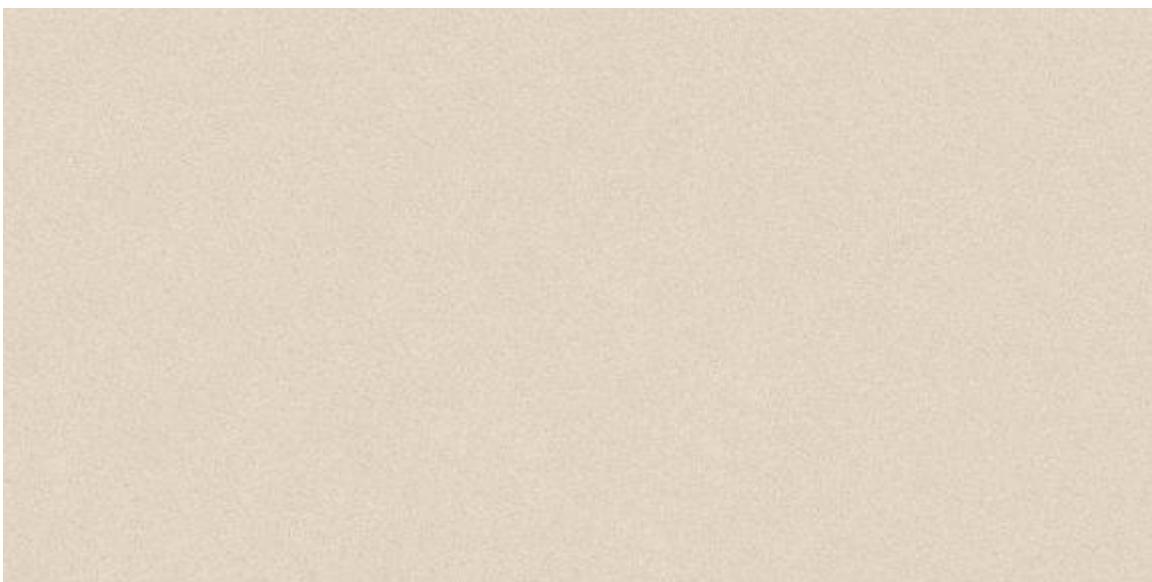

K-16852

MATT | GLOSSY

Solitaire Plus

800x1600MM

Full Body Vitrified Tiles

Polished/Matt



K-16853

MATT | GLOSSY



K-16854


MATT | GLOSSY

Solitaire Plus

800x1600MM


Full Body Vitrified Tiles

Polished/Matt

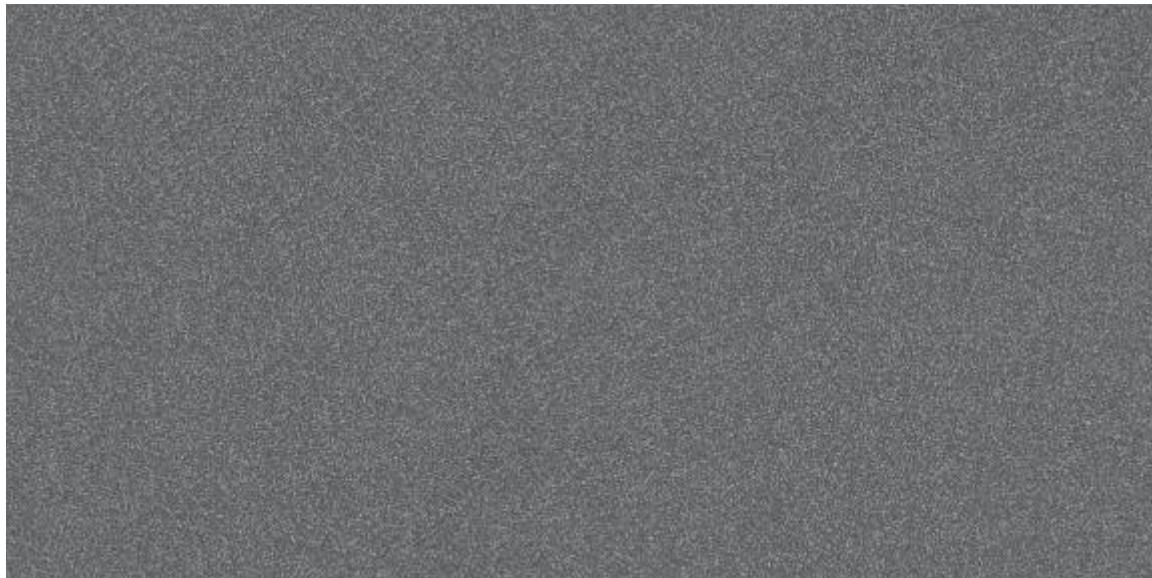

K-16856

MATT | GLOSSY

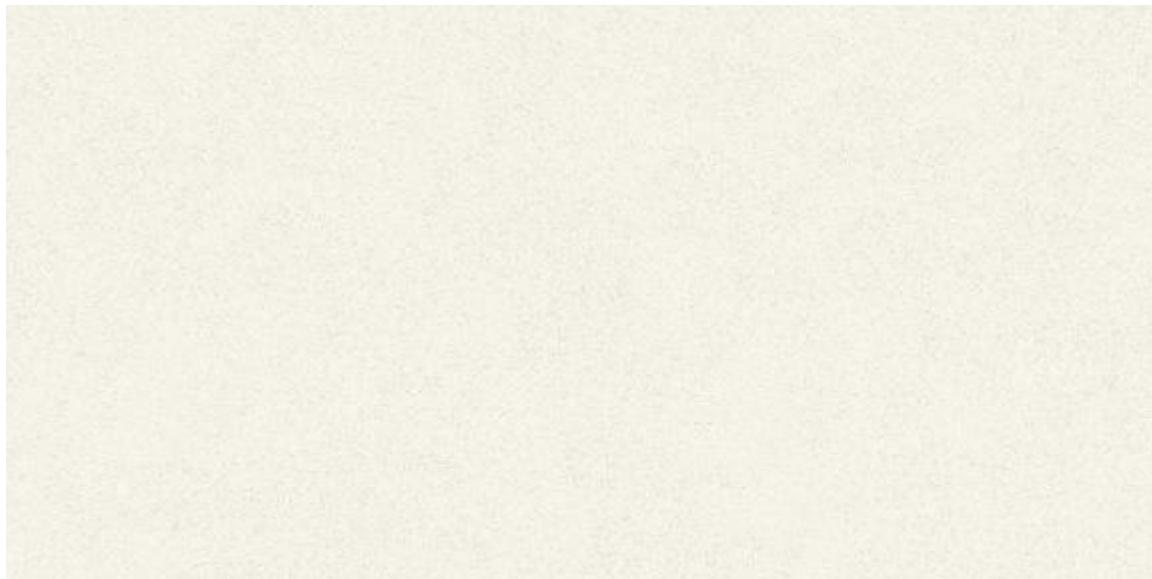

K-16857

MATT | GLOSSY

Kajaria



Kajaria




Solitaire Plus

800x1600MM


Full Body Vitrified Tiles

Polished/Matt

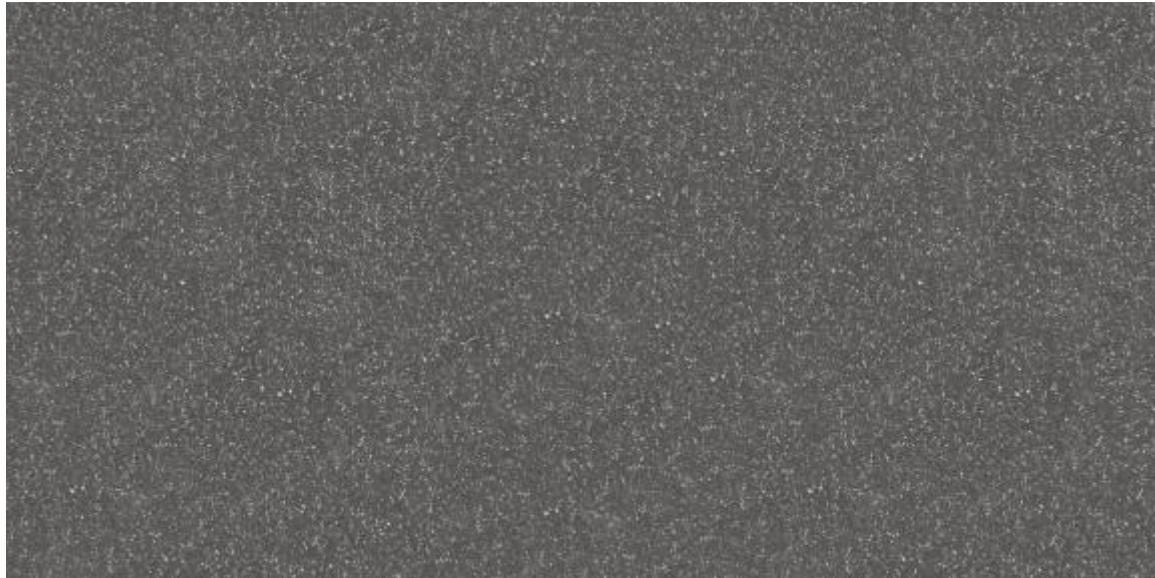

K-16858

MATT | GLOSSY

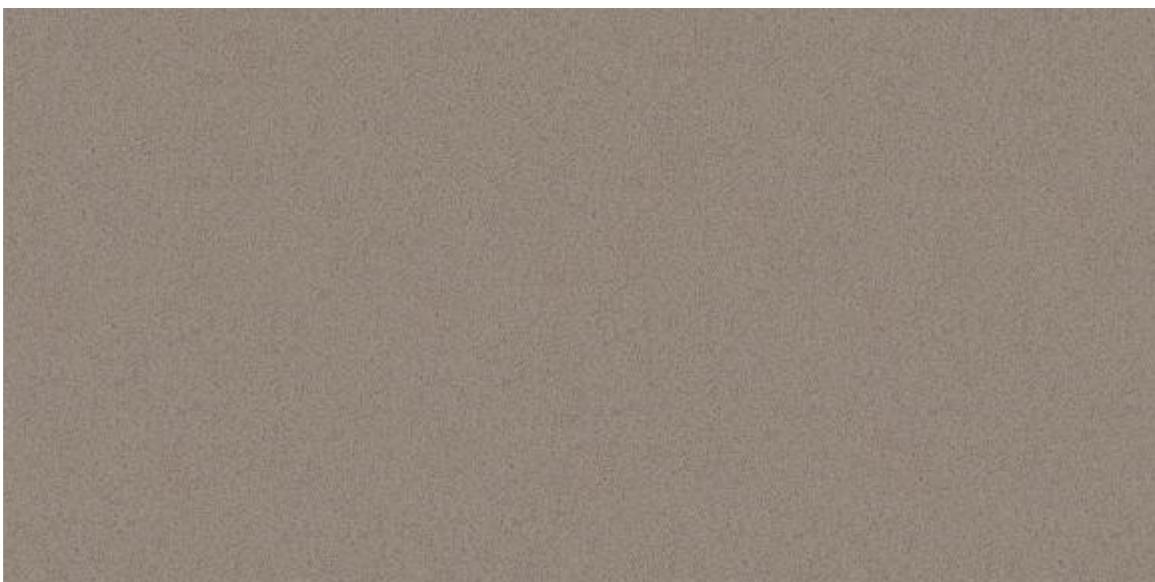

K-16859

MATT | GLOSSY



Solitaire Plus

1000x1000 MM

One Surface Many Possibilities

Introducing Solitaire Plus 1000x1000 mm vitrified tiles. Kajaria's exclusive technologies, high standards and reliability are matched with style, taste and design of these tiles. Indulge into a grandiosity of space which reflects refined delicacies. The tiles symbolize the epitome of a luxe yet contemporary collection.

Double Charge Polished Vitrified Tiles




Solitaire Plus


1000x1000MM

Double Charge Polished Vitrified Tiles

Super Glossy



K 10101

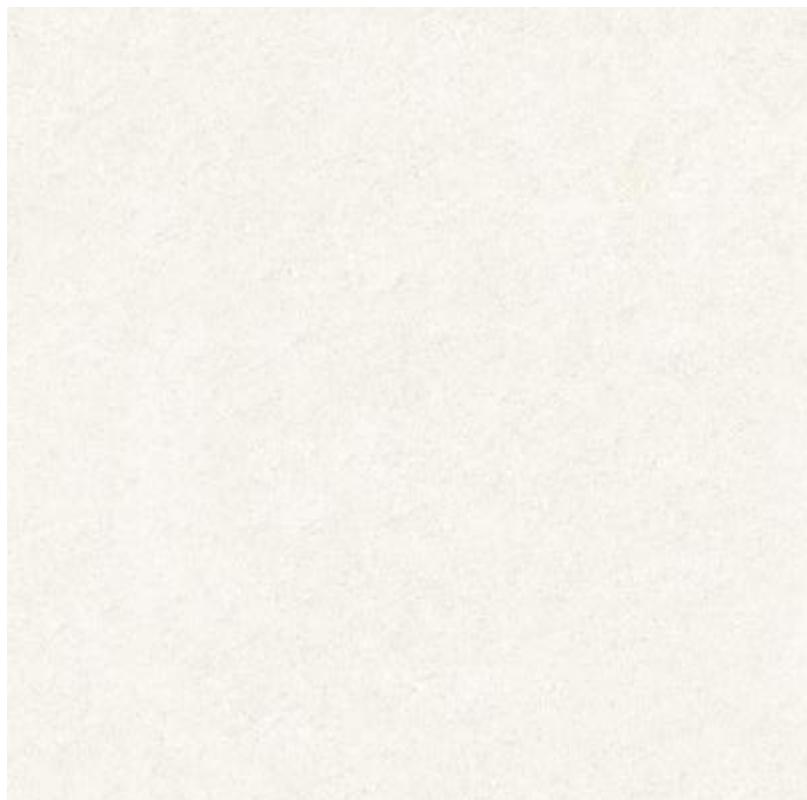

K 10102

Kajaria



Kajaria



Solitaire Plus


1000x1000MM

Double Charge Polished Vitrified Tiles

Super Glossy



K 10104

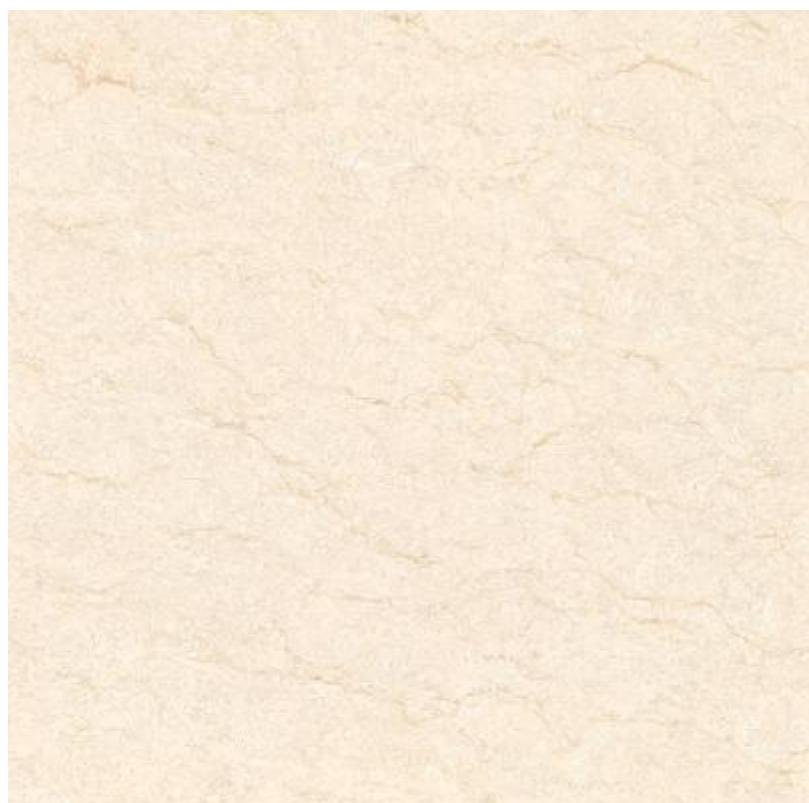

K 10105

Solitaire Plus

1000x1000MM

Double Charge Polished Vitrified Tiles

Super Glossy



K 10106



K 10107

Kajaria



Solitaire Plus

1000x1000MM

Double Charge Polished Vitrified Tiles

Super Glossy



K 10108





K 10109



Solitaire

800x800 MM

The Gem of Every Adobe

The essential synthesis of aesthetics and quality of materials, Solitaire is the shining gem in polished vitrified tiles, with a profound aesthetic design, and the emblem of Kajaria. These 80x80 cm floor tiles are remarkable in appeal and embraces all colors. Kajaria's exclusive technologies, high standards and reliability are matched with style, taste and design of these tiles. Indulge into a grandiosity of space which reflects refined delicacies. The tiles symbolize the epitome of a luxe yet contemporary collection.

Double Charge Polished Vitrified Tiles



Solitaire

800x800MM

Double Charge Polished Vitrified Tiles

Super Glossy



K 8401



K 8402




K 8403



K 8404



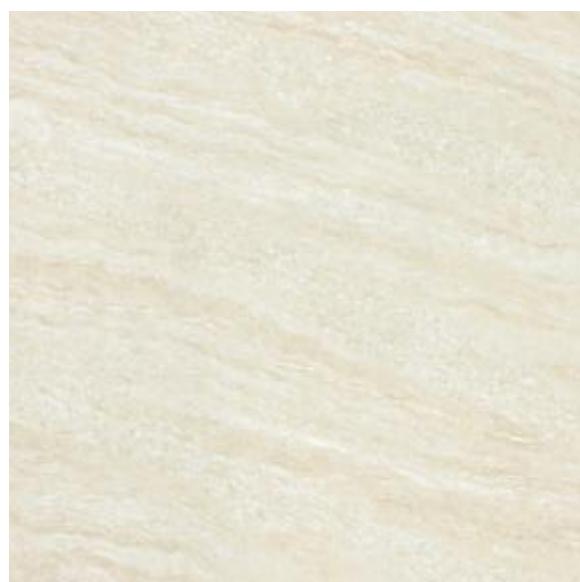

K 8405



K 8409

Solitaire


800x800MM

Double Charge Polished Vitrified Tiles

Super Glossy



K 8411

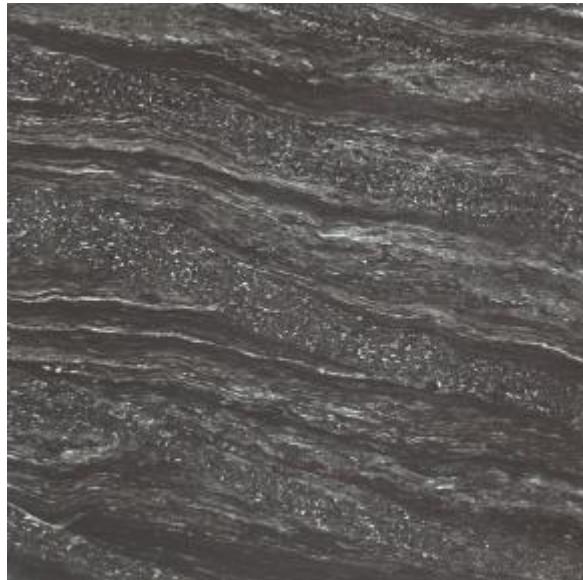

K 8412



Solitaire

800x800MM

Double Charge Polished Vitrified Tiles

Super Glossy



K 8501



K 8502



K 8503




K 8504

Kajaria





K 8505

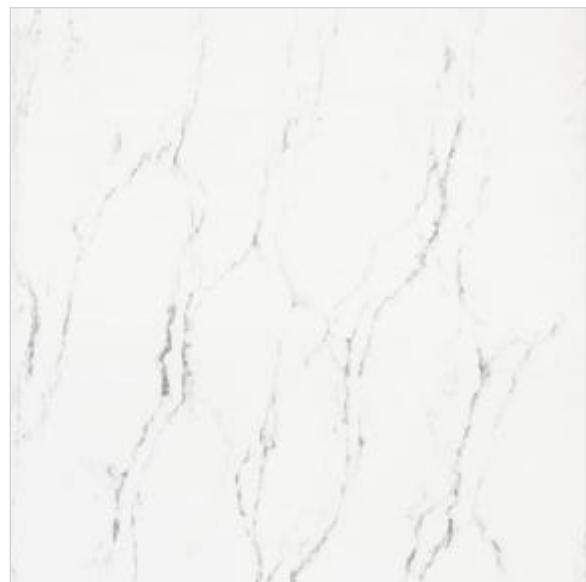

K 8506

Solitaire

800x800MM

Double Charge Polished Vitrified Tiles

Super Glossy



K 8507



K 8508






Tropicana

800x800 MM

Alluring Beauty

With the interplay of astounding grandeur and blissful perception of space, this series will surely charm your heart and refine your space. The 80x80 cm tiles enable you to expand your boundaries of imagination and design with a glorious display of various designs to adorn your floors. Skillfully crafted by using state-of-the-art technologies, these tiles are durable in both form and function. Experience the constant balance between modernity and harmony aligning with the most innovative standards.

Double Charge Polished Vitrified Tiles



Tropicana

800x800MM

Double Charge Polished Vitrified Tiles

Super Glossy



K 8301



K 8302



Tropicana

800x800MM

Double Charge Polished Vitrified Tiles

Super Glossy



K 8303



K 8306



K 8307





Sapphire

600x1200 MM

Beauty in
Perfect Size.

Introducing double charge polished vitrified tiles in the size of 60x120 cm for the first time in India. Sapphire is created from the evolution of metropolitan style, that makes up the urban lifestyle. Created with the finest elements and conceived with a unique vision, Sapphire combines sensational designs with practical dimensions in one compelling form. A stunning product, cladding all kinds of interiors, conferring harmony and charm in the most mesmerizing way.

Double Charge
Polished Vitrified Tiles



Sapphire

600x1200MM

Double Charge Polished Vitrified Tiles

Super Glossy



K 12601



K 12602



K 12604



K 12605

Kajaria



Kajaria



Sapphire

600x1200MM

Double Charge Polished Vitrified Tiles

Super Glossy



K 12606



K 12608



K 12609



K 12611





Sapphire

600x1200MM

Double Charge Polished Vitrified Tiles

Super Glossy



K 12612



K 12618



K 12621




K 12623

Sapphire

600x1200MM

Double Charge Polished Vitrified Tiles

Super Glossy

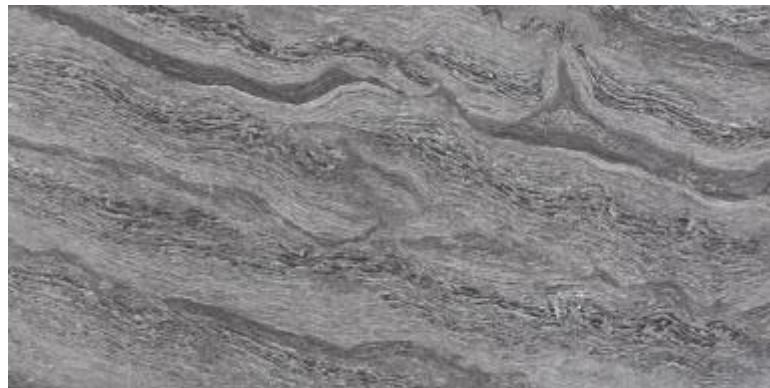


K 12626



K 12627



K 12628

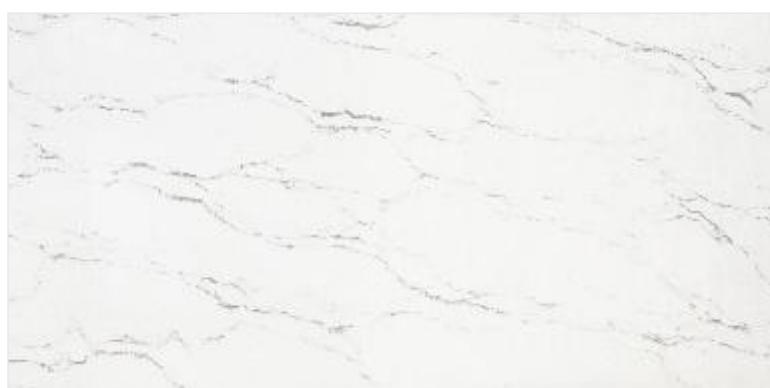

K 12629

Sapphire


600x1200MM

Double Charge Polished Vitrified Tiles


Super Glossy




K 12632

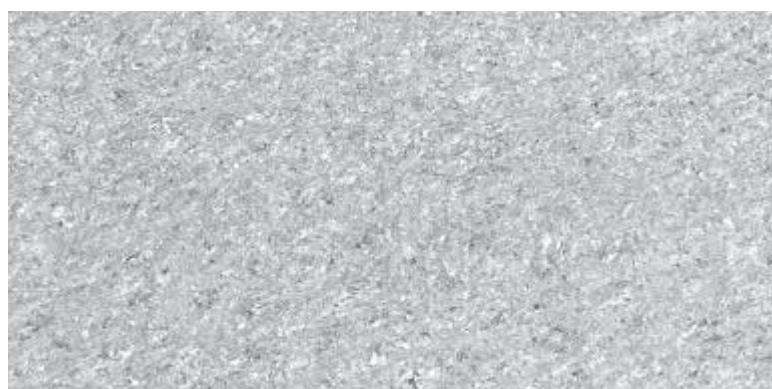

K 12642

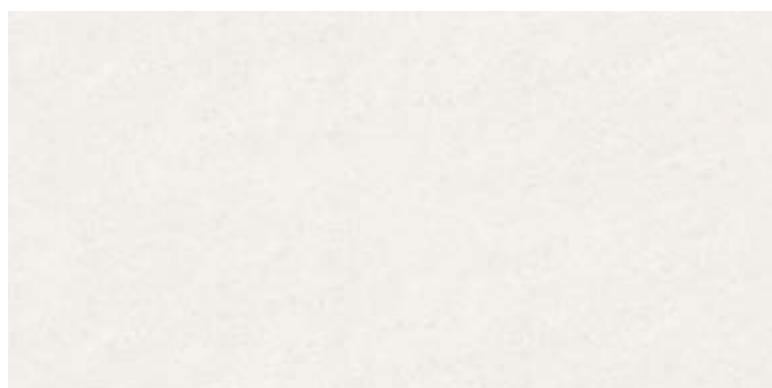

K 12646

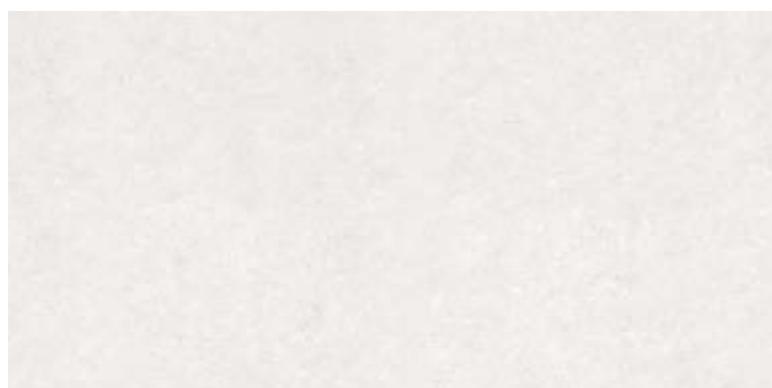

K 12647



K 12648



K 12649



Kajaria

Terrazzo

600x1200 MM

**FULL
BODY**

Inner Beauty
which captivates

Terrazzo is a uniformly textured surface designed for interior & exterior use in which the matrix is depressed to expose the chips. The newer thin-set and epoxy-based terrazzo options are less labor intensive with greater design flexibility.

Full Body
Vitrified Tiles | Polished | Matt



Terrazzo


600x1200MM

Full Body Vitrified Tiles


Polished/Matt




12671 - POLISHED/MATT

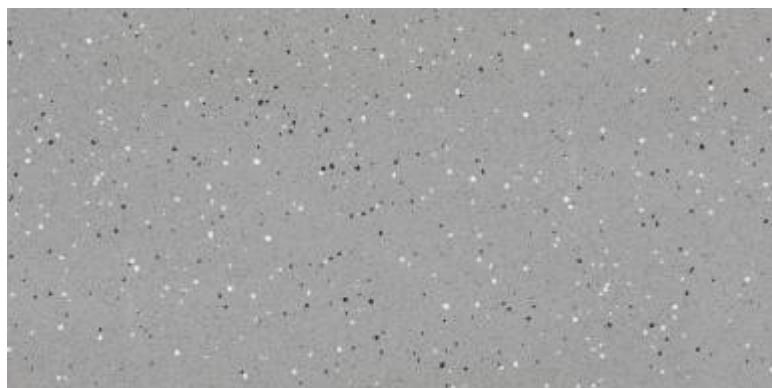

12672 - POLISHED/MATT

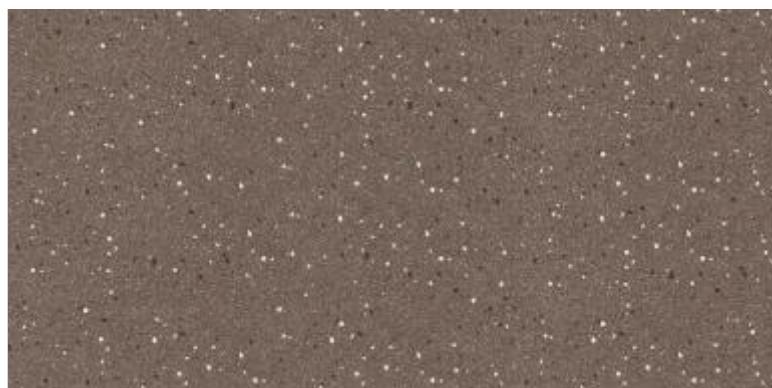

12674 - POLISHED/MATT

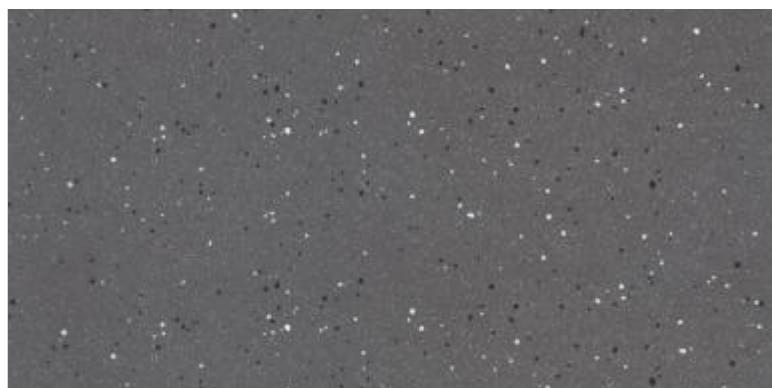

12675 - POLISHED/MATT

Kajaria





12676 - POLISHED/MATT

Terrazzo


600x1200MM

Full Body Vitrified Tiles

Polished/Matt



12677 - POLISHED/MATT

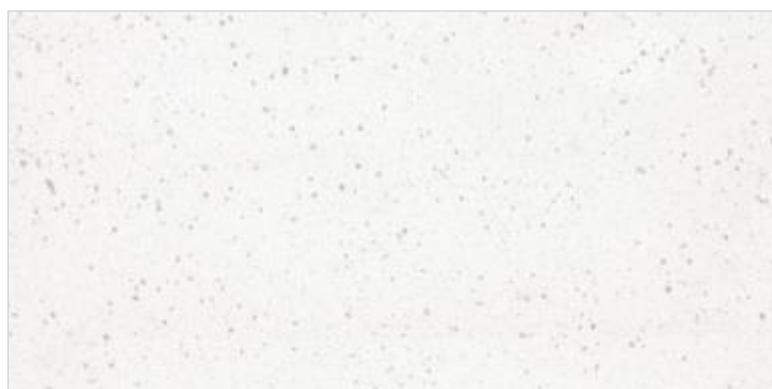

12681 - POLISHED/MATT



12682 - POLISHED/MATT



12683 - POLISHED/MATT

STEP STONE

READY TO INSTALL VITRIFIED STEPS



SELF EMBOSSED TREAD LINES

Highly durable, ideal for heavy traffic and commercial areas, Indoor & Outdoor.

Easy and speedy installation. Say goodbye to cumbersome cutting and finishing on site.

Embossed Tread Lines Provide extra grip for higher safety near step edge. Unique full bull nose edges

Provides higher strength and durability as desired in big size slabs. An assurance to replace natural stones in a confident way. Highest abrasion resistance



ANTI SKID SURFACE

Ensures 10 times superior surface protection against wear and tear over natural stones.




BULL NOSE FINISH

Available in 8 beautiful Salt & Pepper shades. Suits the building theme, décor and desired contrast.

Sizes available



THICKNESS
12 MM(STEPS)

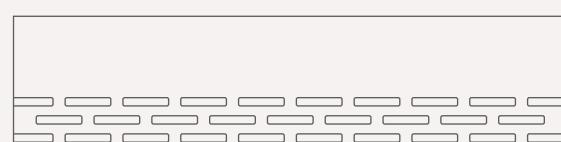

steps 300x1200mm




WATER ABSORPTION
<0.05%



riser 200x1200mm



FULL BODY VITRIFIED STEPS



landing area tile 600x1200mm



EASY LAYING

Step Stone


300x1200 MM STEP
200x1200 MM RISER

FULL
BODY

Ready to Install Steps and Risers

Stairs and staircases are not defined by their functionality alone. These practical units are also interesting from a design perspective as well-appointed stairs are today a defining feature in houses, rooms or hallways. Kajaria Step Stone Vitrified Steps and riser comes with different colours and shades, suits to your interior and exterior spaces.

Full Body Vitrified Tiles | Matt




Step Stone

300x1200MM STEP
200x1200MM RISER

Full Body Vitrified Tiles

Matt

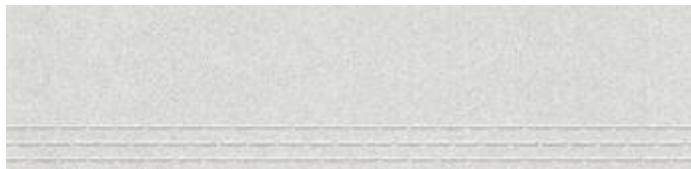

12351 | STEP

300x1200MM



12651 | LANDING AREA TILE


600x1200MM



12251 | RISER


200x1200MM



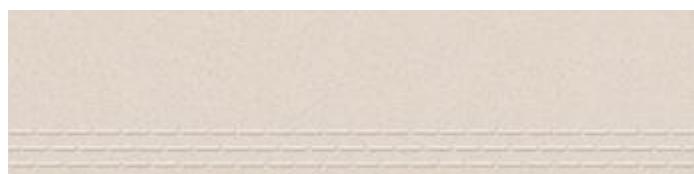

12352 | STEP

300x1200MM

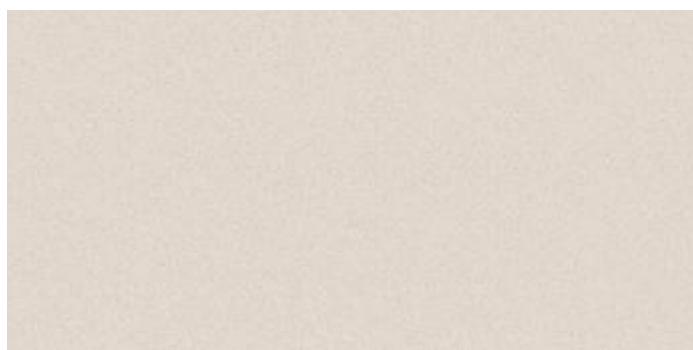

12252 | RISER

200x1200MM

12652 | LANDING AREA TILE

600x1200MM

Step Stone

300x1200MM STEP
200x1200MM RISER

Full Body Vitrified Tiles

Matt



12353 | STEP

300x1200MM




12253 | RISER

200x1200MM

12653 | LANDING AREA TILE

600x1200MM

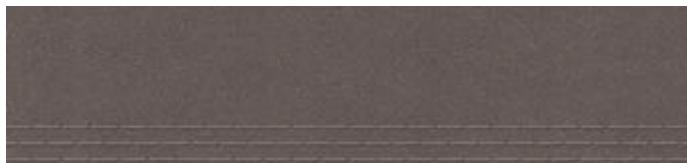

12354 | STEP

300x1200MM




12254 | RISER

200x1200MM

12654 | LANDING AREA TILE

600x1200MM

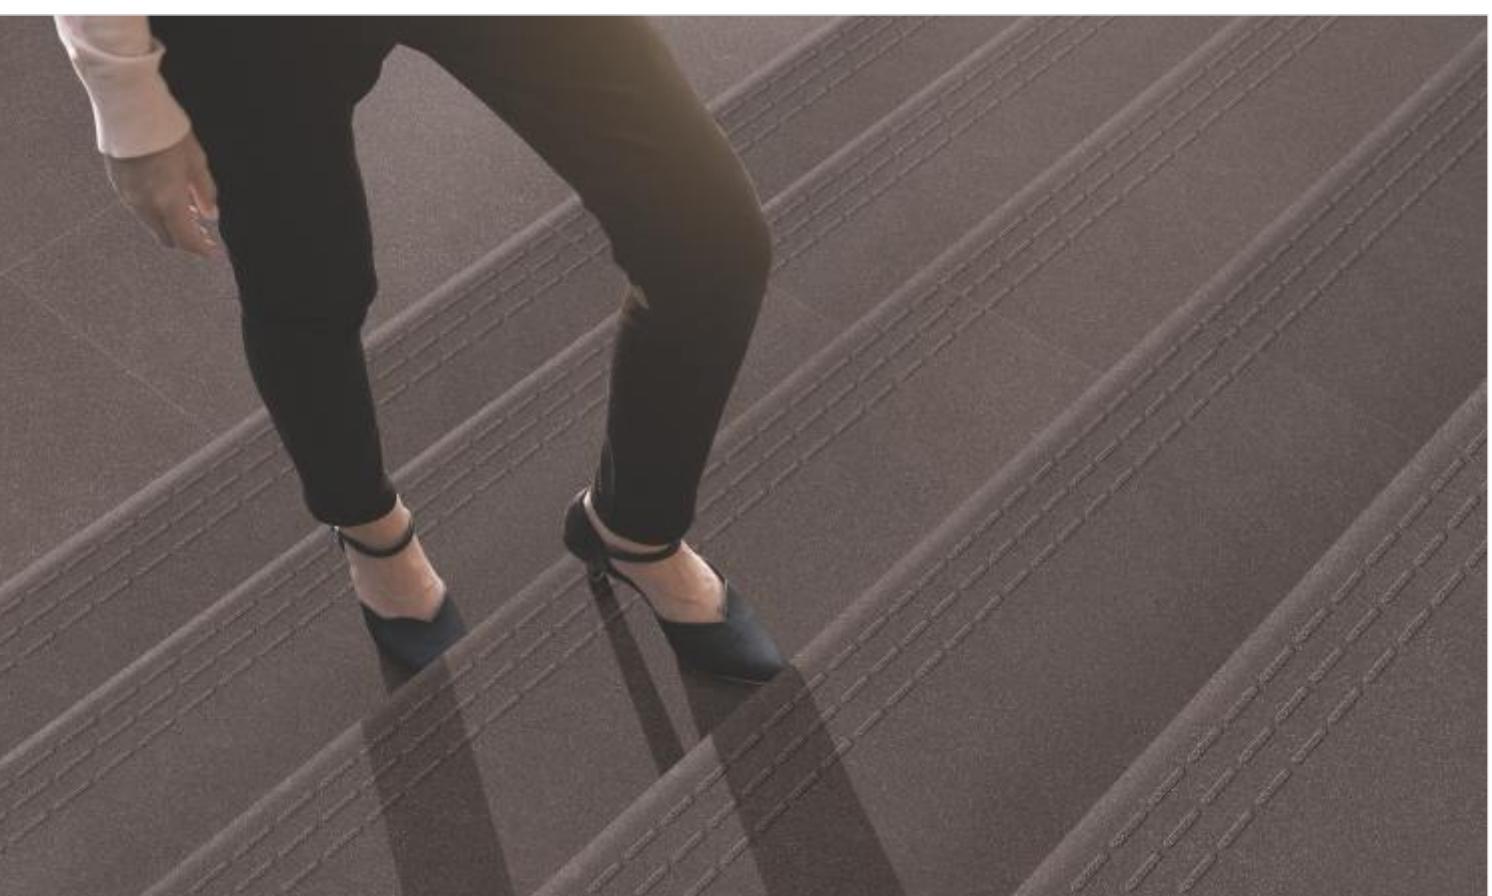



12355 | STEP

300x1200MM




12255 | RISER

200x1200MM

12655 | LANDING AREA TILE

600x1200MM

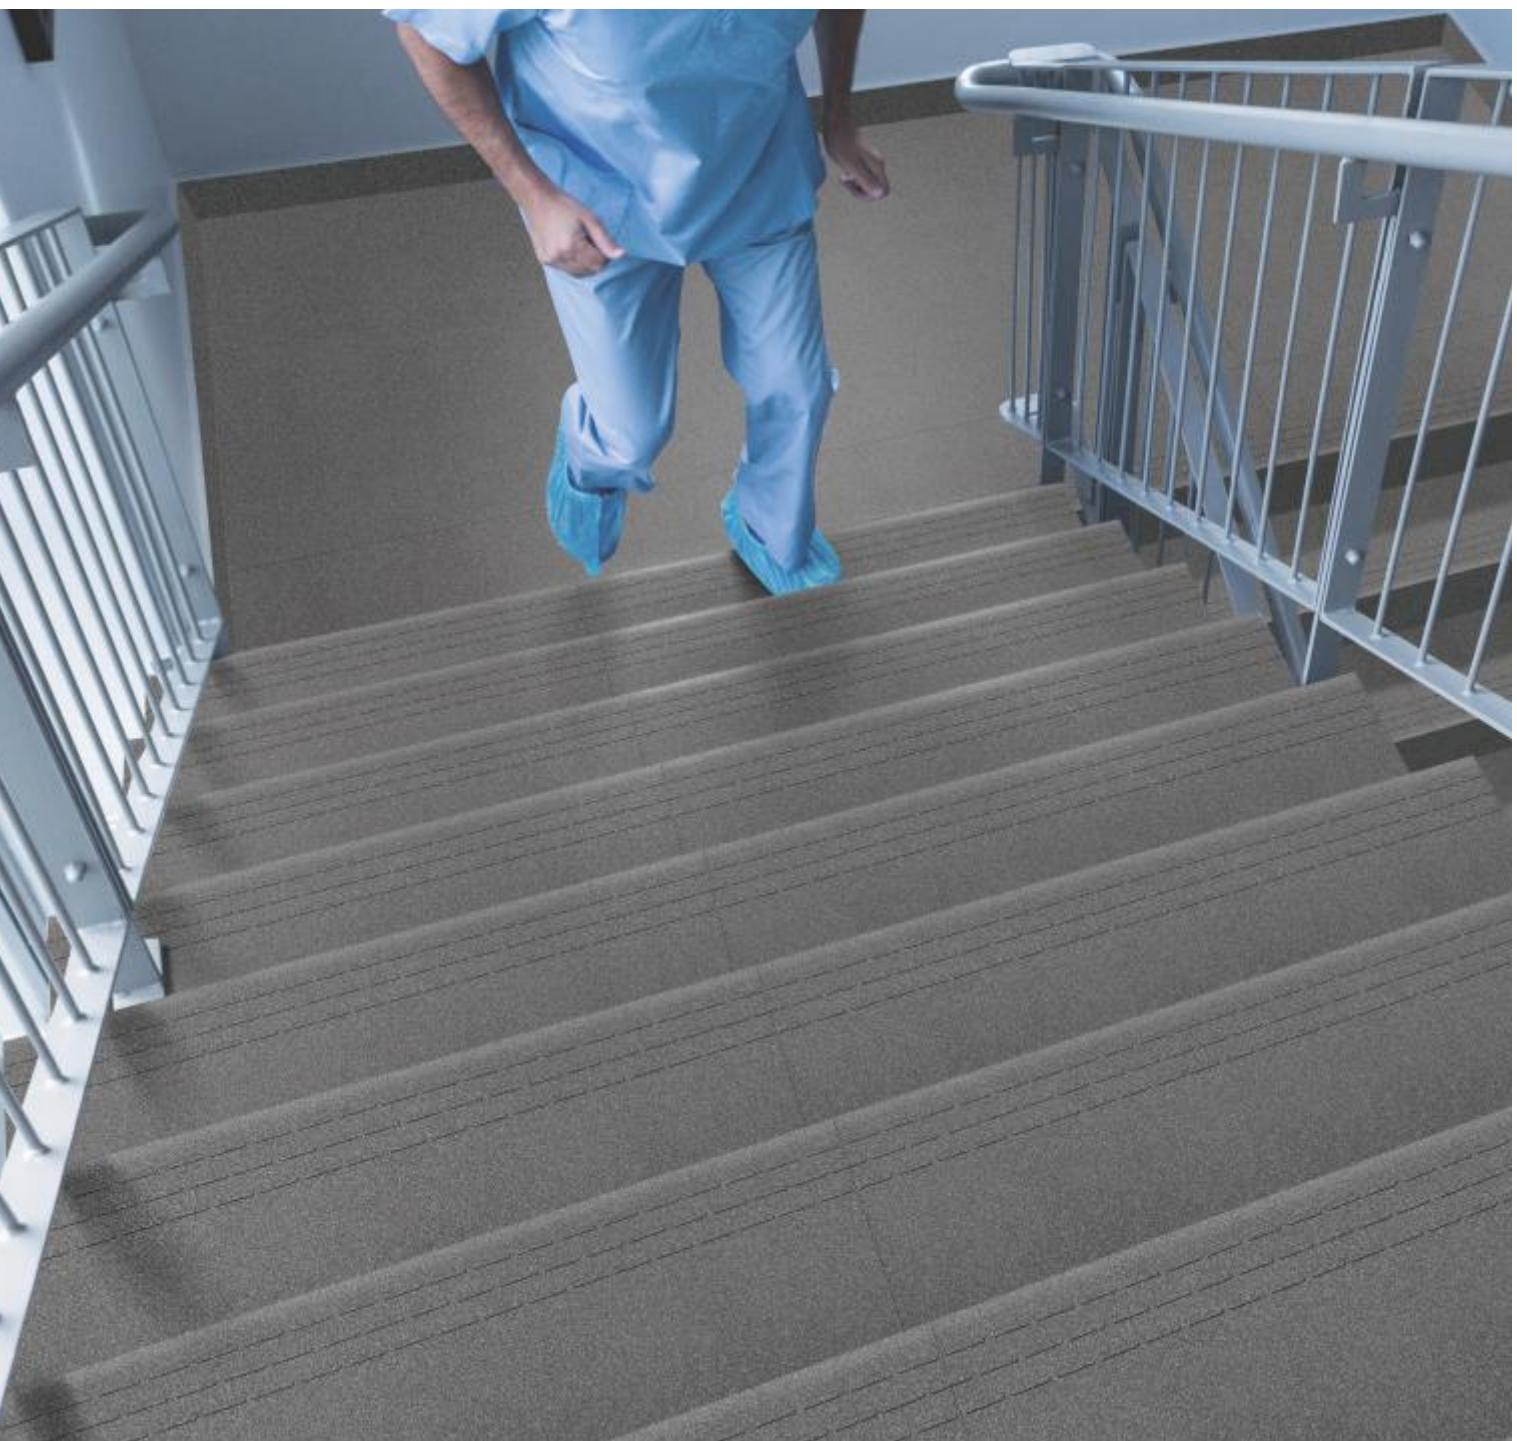

12356 | STEP

300x1200MM



12256 | RISER

200x1200MM

12656 | LANDING AREA TILE

600x1200MM

Step Stone

300x1200MM STEP
200x1200MM RISER

Full Body Vitrified Tiles

Matt



12357 | STEP


300x1200MM



12257 | RISER

200x1200MM 12657 | LANDING AREA TILE

600x1200MM

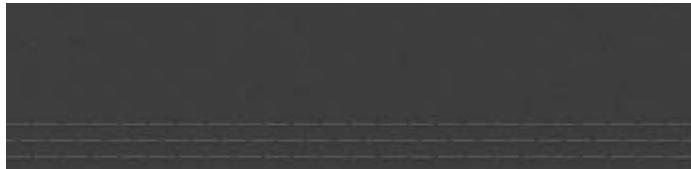

12358 | STEP


300x1200MM



12258 | RISER

200x1200MM 12658 | LANDING AREA TILE

600x1200MM

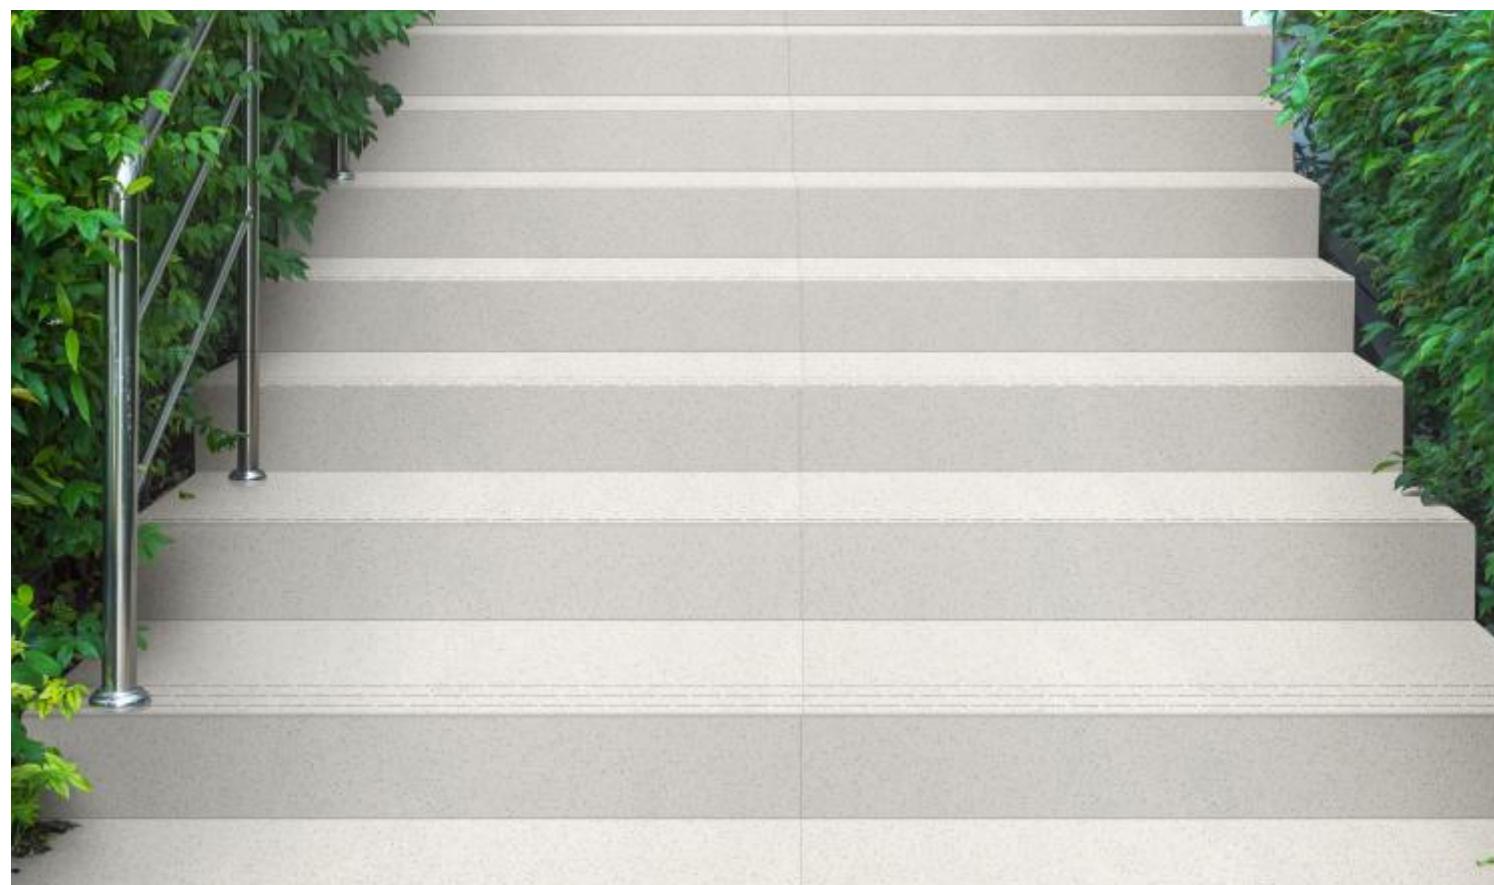



1

Deep
Chamfering



2

Fullbody
Surface



Extra
Texture

Kajaria

StoneGres Plus

600x1200 MM

**FULL
BODY**

Journey into Yourself

STONE GRES PLUS is able to evoke the beauty of antique stone paving, natural effect stones that provide a unique touch to any setup. STONE GRES PLUS is ideal to create passageways in modern gardens terraces and patios as well as interior and heavy transit area.

Full Body
Vitrified Tiles | Polished | Matt




StoneGres Plus


600x1200MM

Full Body Vitrified Tiles

Polished/Matt

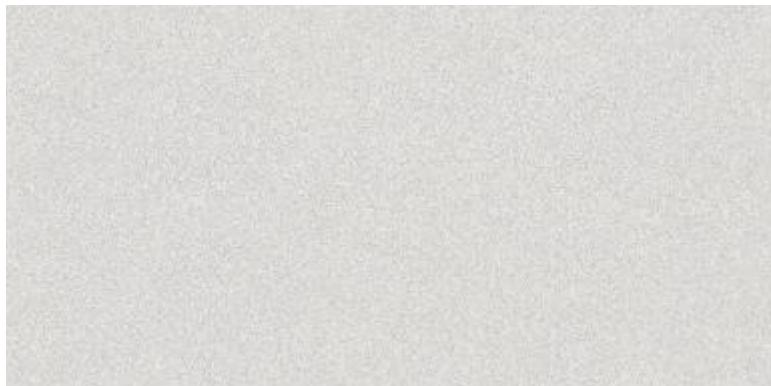


12651 - POLISHED/MATT

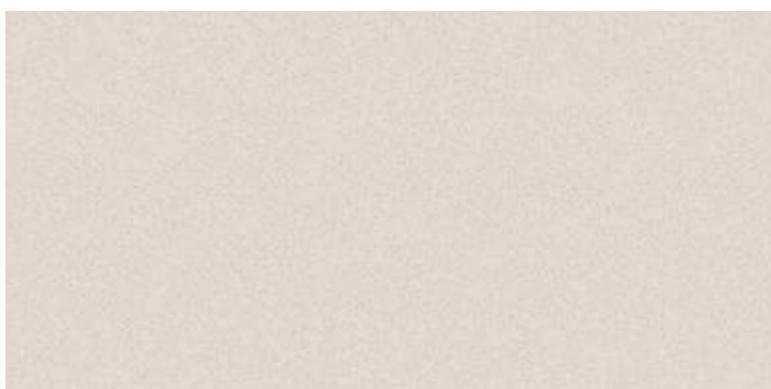

12652 - POLISHED/MATT



12653 - POLISHED/MATT

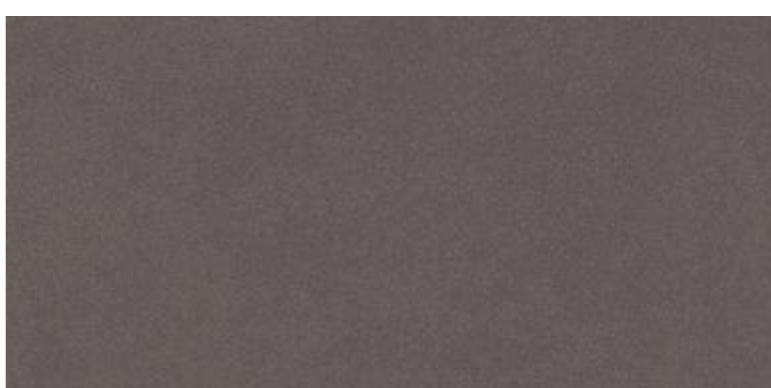

12654 - POLISHED/MATT

Kajaria



Kajaria







12655 - POLISHED/MATT



12656 - POLISHED/MATT

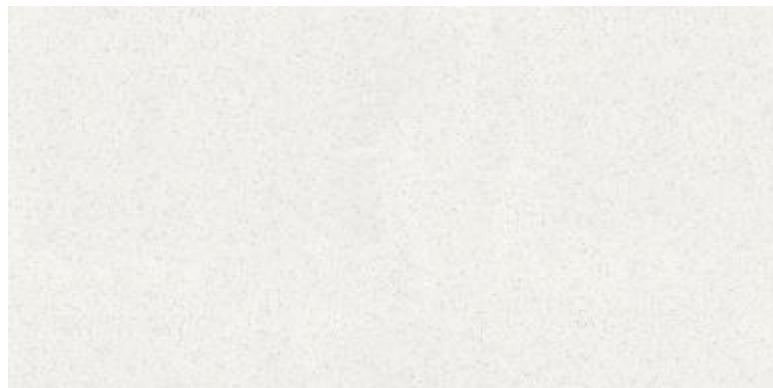

12657 - POLISHED/MATT

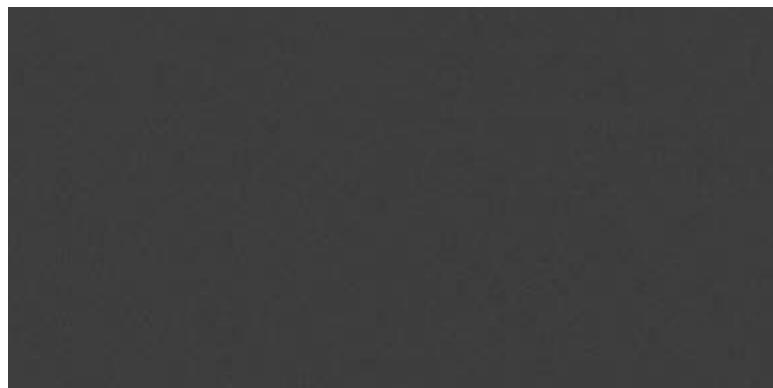

12658 - POLISHED/MATT



**TOUGH
BUILD**



**FULL
BODY**

Kajaria

StoneGres Neo

600x600 MM

**FULL
BODY**

Tough build and
unmatched quality

STONE GRES NEO built with the best raw materials and technology, these full body tiles offer a sturdy, lasting performance for years with minimum wear and tear. These tiles have a uniform colour throughout and are consistent in their shape, size, and colour. This adds a classy and seamless look to your spaces that looks great for years without fading.

Full Body
Vitrified Tiles




StoneGres Neo


600x600MM

Full Body Vitrified Tiles


Salt & Pepper

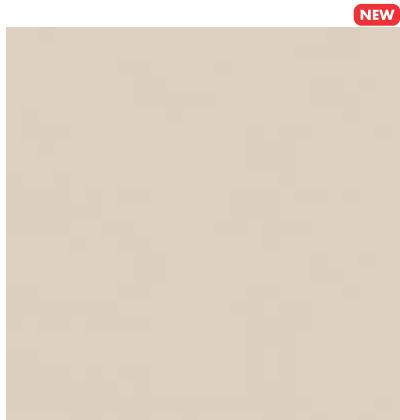


K 6700 - POLISHED

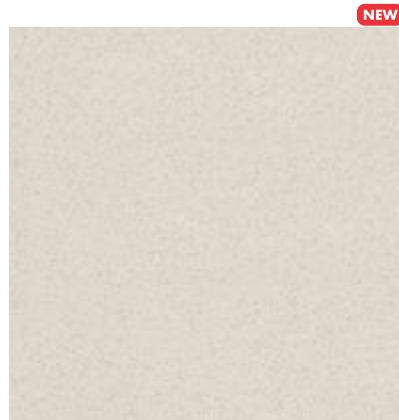


K 6701 - POLISHED

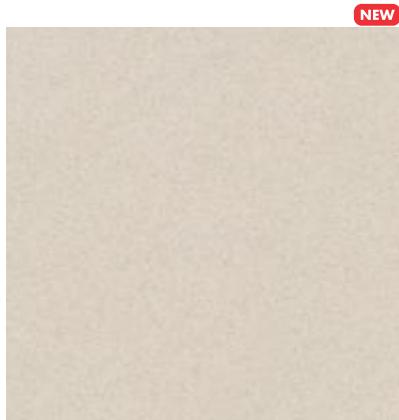


K 6702 - POLISHED

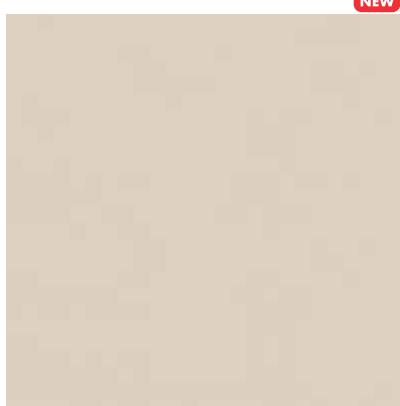

K 6700 - MATT

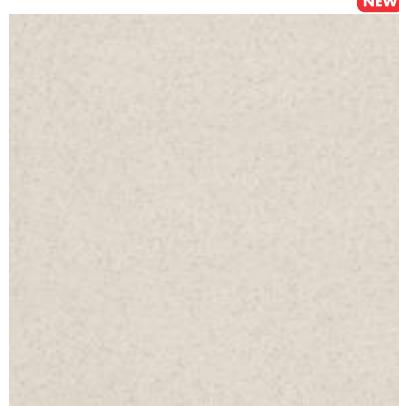

K 6701 - MATT

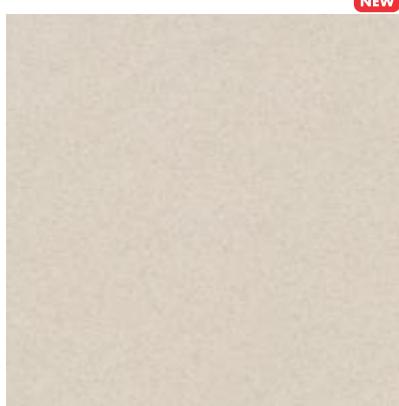

K 6702 - MATT





K 6703 - POLISHED



K 6704 - POLISHED



K 6705 - POLISHED



K 6703 - MATT



K 6704 - MATT



K 6705 - MATT

Kajaria



StoneGres Neo


600x600MM

Full Body Vitrified Tiles

Salt & Pepper




K 6706 - POLISHED



K 6711 - POLISHED



K 6706 - MATT

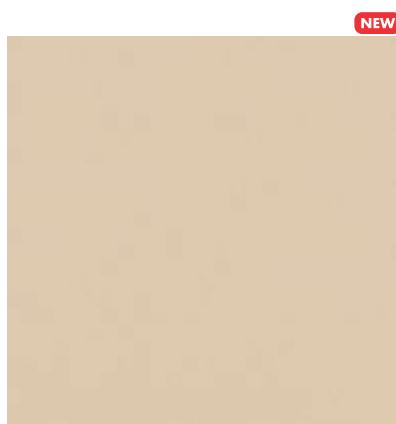


K 6711 - MATT



K 6712 - POLISHED



K 6713 - POLISHED



K 6712 - MATT



K 6713 - MATT



Kajaria

StoneGres

600x600 MM

**FULL
BODY**

Journey into Yourself


STONE GRES is able to evoke the beauty of antique stone paving, natural effect stones that provide a unique touch to any setup. STONE GRES is ideal to create passageways in modern gardens terraces and patios as well as interior and heavy transit area.

Full Body Vitrified Tiles





K 6601 - POLISHED

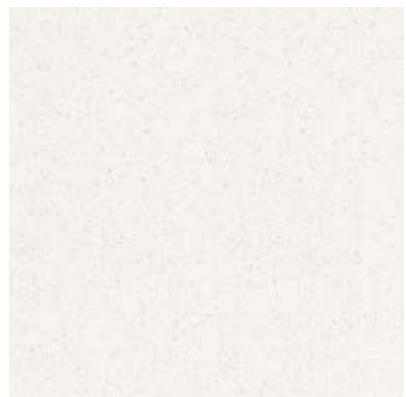


K 6602 - POLISHED



K 6603 - POLISHED



K 6601 - MATT

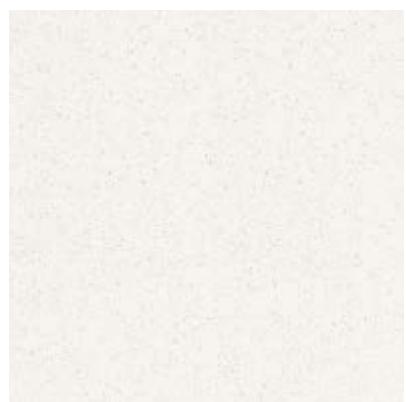


K 6602 - MATT




K 6603 - MATT



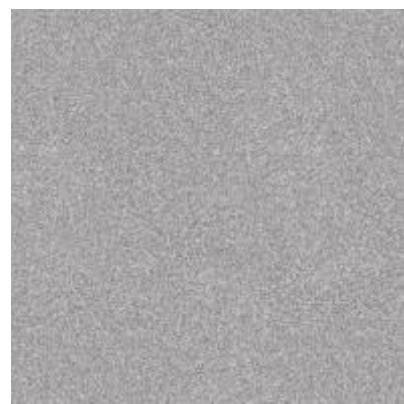


K 6604 - POLISHED

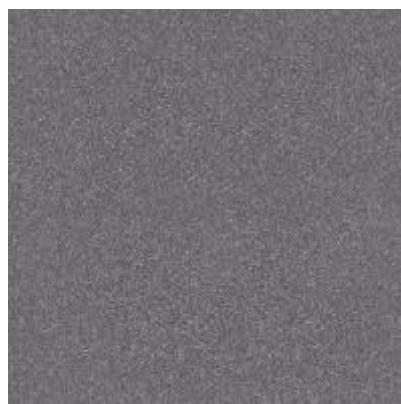

K 6605 - POLISHED



K 6604 - MATT

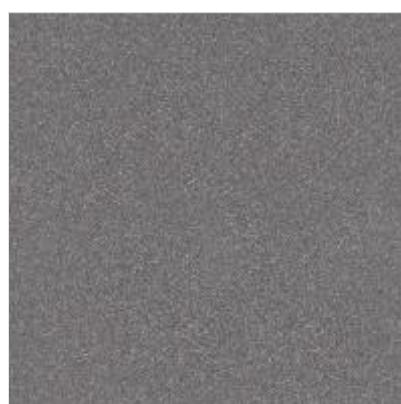

K 6605 - MATT




Amazon

600x600 MM

Italian Beauty Amazing Strength

Amazon series by Kajaria inspired by tradition and the most beautiful Italian natural stones, obtained through the use of the most advanced production technologies. The double charge surface represent something unique in terms of the refinement of the details that always original and distinctive. The appearance of polished marble floors and the refined beauty of classical surfaces has now become Amazon - Double Charge Polished Vitrified Tiles.

Polished Italian Vitrified Tiles



Amazon

600x600MM

Polished Italian Vitrified Tiles

Super Glossy



K 6401




K 6402



K 6403



K 6404

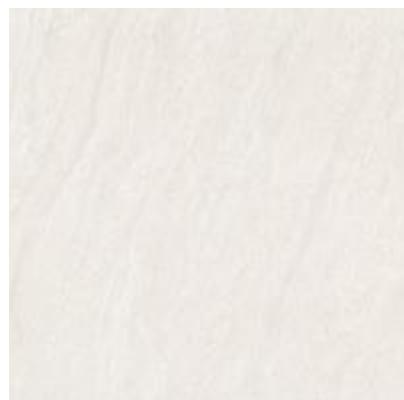

K 6405




K 6406







K 6407

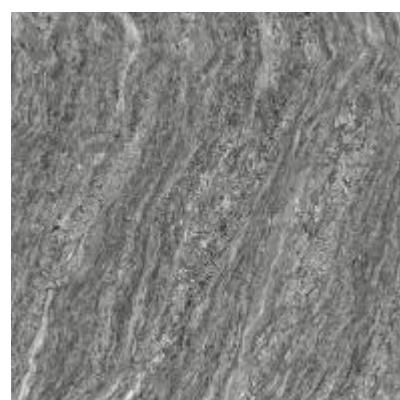

K 6411

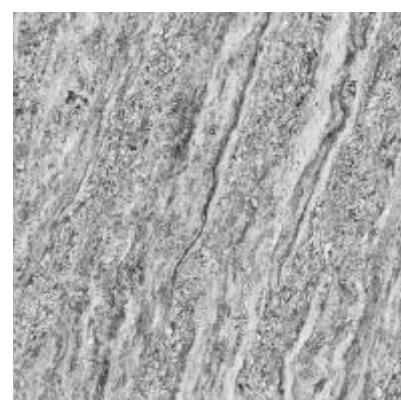

K 6413

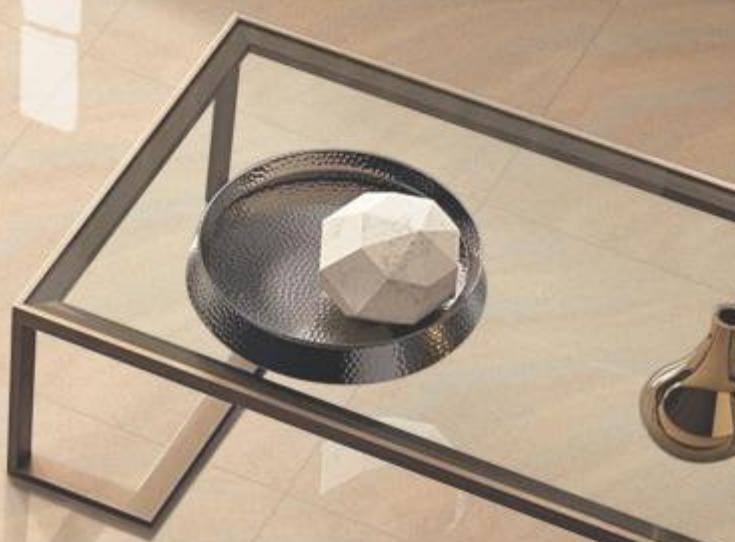

Sandune

600x600 MM

Feel The Ecstasy of Sand

Experience the true feel of sand. The charm of exquisite beauty, the tiles resonate the striking surfaces of sand dunes. These versatile tiles confer a creative freedom that ensures extensive personalization. The sensual and organic beauty of sand is aptly emulated in this collection of 60x60 cm tiles. Rich, undulating textures, manufactured with unparalleled quality and precise pro-craftsmanship. An astounding combination of beauty and durability. Ideal for the home of your dreams.

Double Charge Polished Vitrified Tiles



Sandune

600x600MM

Double Charge Polished Vitrified Tiles


Super Glossy



K 6801



K 6802

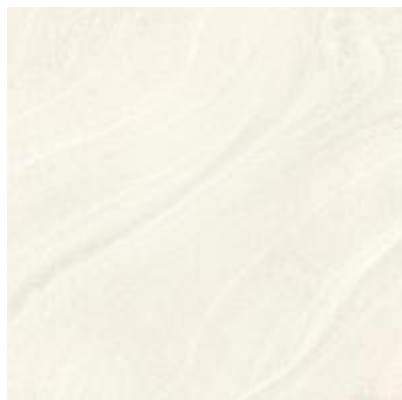

K 6805



K 6807



K 6808




K 6809





K 6813

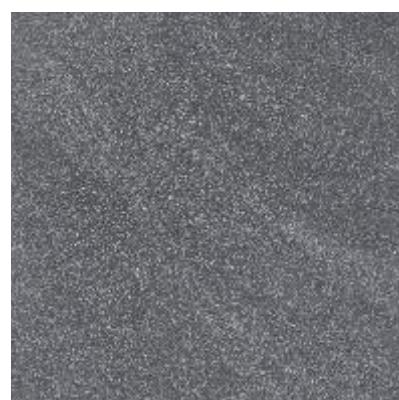

K 6814



K 6818



Stone Art

600x600 MM

The Aesthetic Culture


The stone art collection reproduces the effects of the finest stone, combined with the strength and durability of polished vitrified tiles. The tiles come in six stunning designs with three distinct finishes, satin matt, rock and slate, one more stunning than the other. Canvassing nature's exquisite forms, Kajaria's 60x60 cm Stone Art tiles present an aesthetic culture that will enhance outdoors to a whole new level. These random vitrified tiles are super resilient to harsh weather, hence ideal for high traffic areas.

Double Charge Vitrified Tiles





K 6806 - SATIN MATT

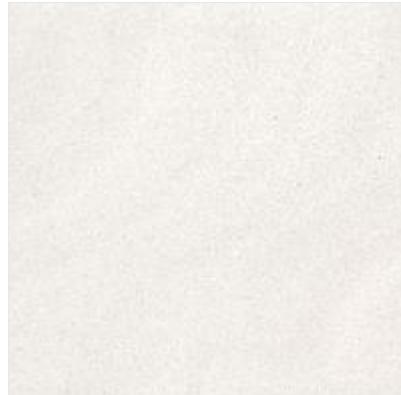

K 6813 - SATIN MATT




K 6807 - SATIN MATT



K 6807 - SLATE




K 6814 - SATIN MATT

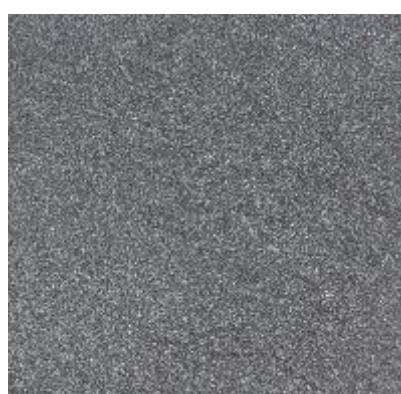

K 6814 - SLATE

Kajaria

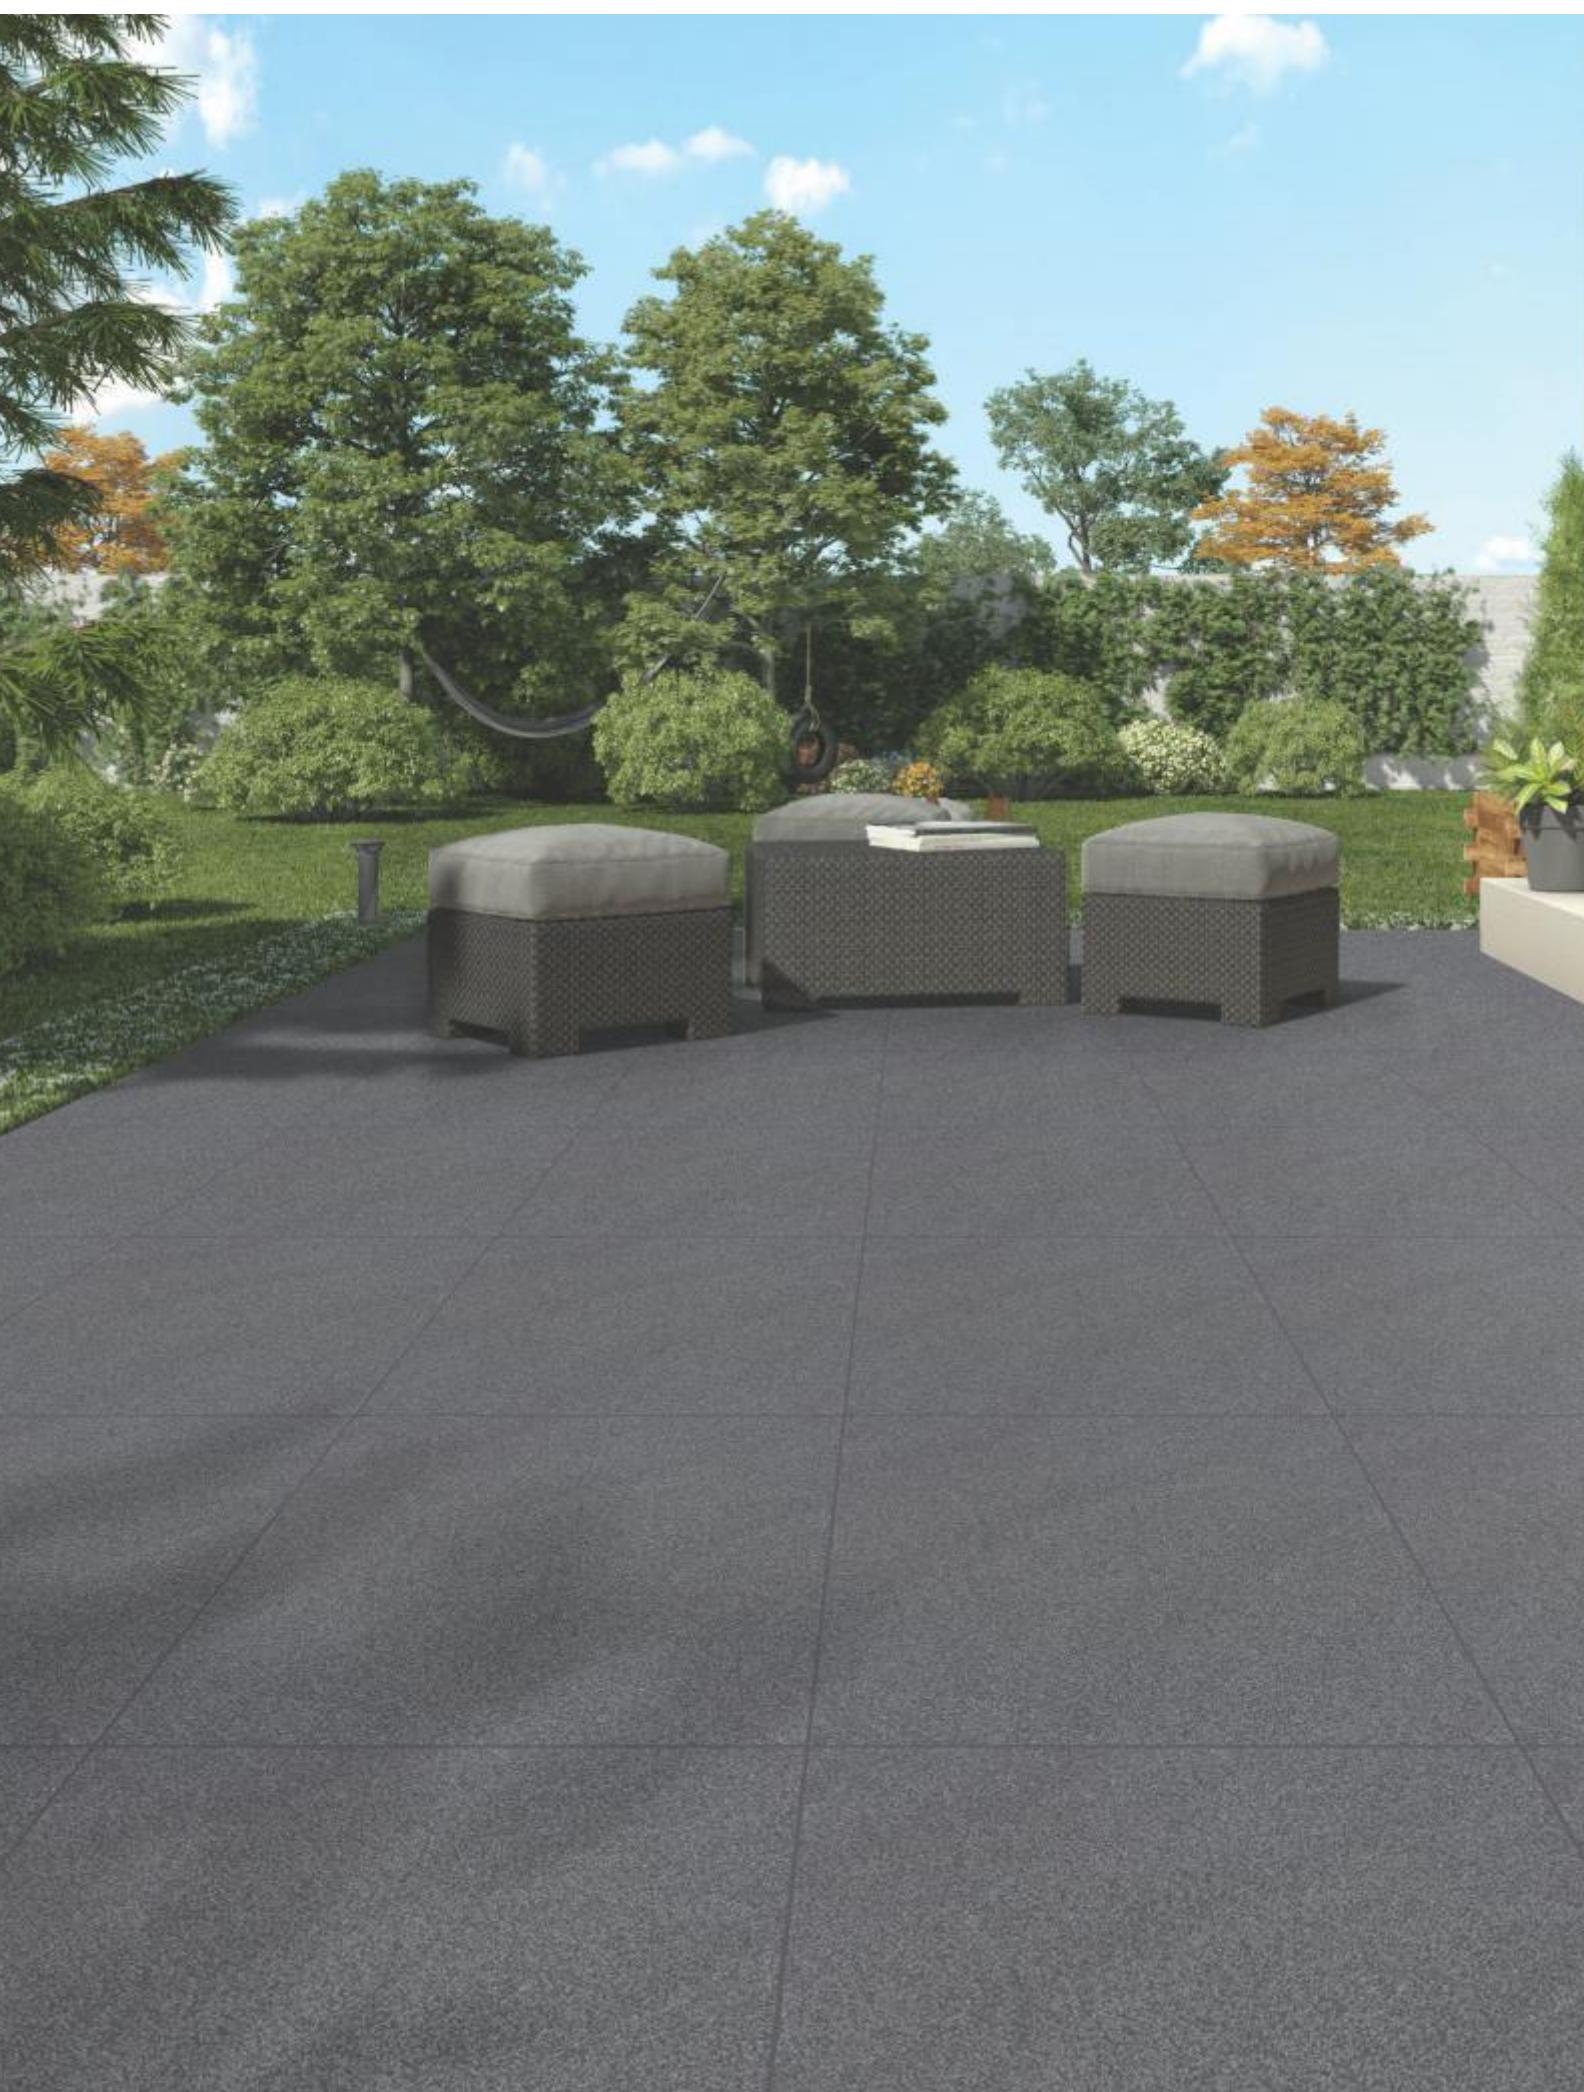

Stone Art

600x600MM

Double Charge Vitrified Tiles

Stone Finish



K 6815 - SATIN MATT



K 6815 - SLATE





K 6818 - SATIN MATT



K 6818 - SLATE



Double Charge

600x600 MM

Electrifying Spaces

A range of Double Charge Polished Vitrified Tiles that comprises the finest quality tiles for you to transform your space. The Double Charged Series incorporates tiles designed to enthrall one's senses with sophisticated shades inspired by the beauty of natural stone. Ideal for both homes as well as corporate offices, the Double Charged Series is the new definition of beauty. These double charge tiles are further protected through modern Nano-Technology and super shined through superior modern polishing which adds premium look to your flooring.

Double Charge Polished Vitrified Tiles





K 6029



K 6032



K 6201



K 6204 *



K 6206




K 6207

Double Charge

600x600MM

Polished Vitrified Tiles

Super Glossy

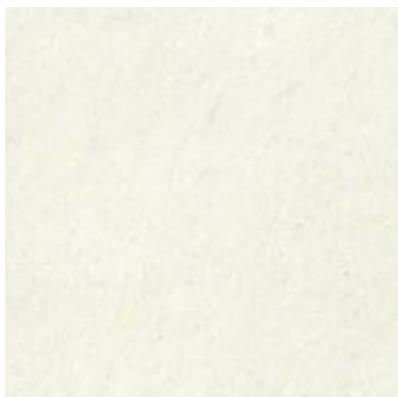


K 6209



K 6210*



K 6211

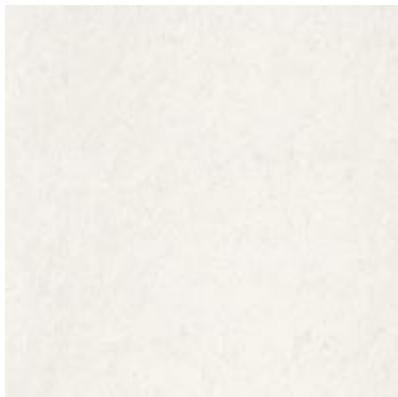

K 6212



K 6213



K 6214*

* for North & East



Double Charge


600x600MM

Polished Vitrified Tiles

Super Glossy



K 6215 *

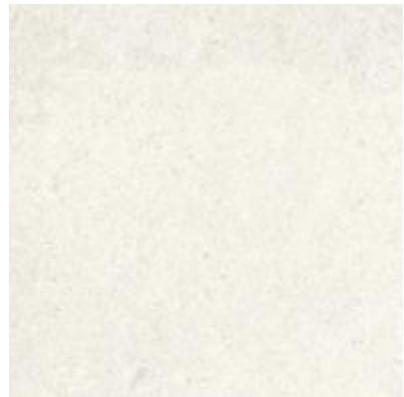

K 6217



K 6223 *

* for North & East







K 6301*



K 6302

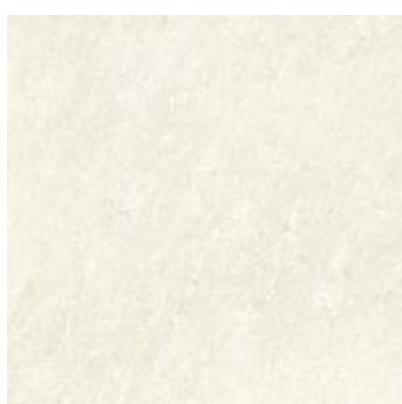

K 6306



K 7000

SPECIAL PLAIN COLOUR

* for North & East

Classic


600x600MM

Double Charge Polished Vitrified Tiles

Super Glossy



K 6351

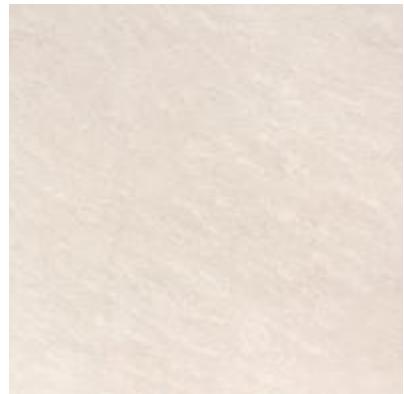

K 6352



K 6353



Classic

600x600MM

Double Charge Polished Vitrified Tiles

Super Glossy



K 6354



K 6355



K 6356



Elegant Soluble Salt

600x600 MM

Rediscover Elegance

An exceptional range of soluble salt tiles that exude the attractiveness and splendor of the spaces. The range of tiles is light in weight yet sturdy, available in varied elegant and fancy textures. The Elegant Soluble Salt collection is available in different styles to fit the needs of traditional as well as modern spaces. This range brings together the sophisticated look of high gloss finish combined with superior functionality. The unmatched physical and chemical properties coupled with matchless designs make these tiles suitable for all settings.

Polished Vitrified Tiles




Elegant Soluble Salt

600x600MM

Polished Vitrified Tiles

Super Glossy



K 6000




K 6002



K 6008




K 6010

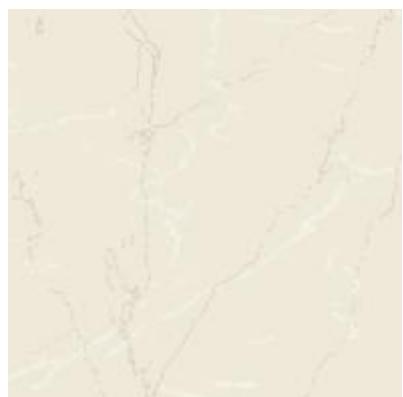

K 6014



K 6018

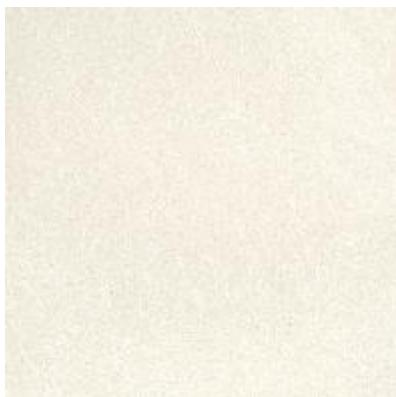

K 6019



K 6101



K 6102



K 6105



K 6107

Kajaria



Elegant Soluble Salt

600x600MM

Polished Vitrified Tiles


Super Glossy



MARBELLA




DYNA

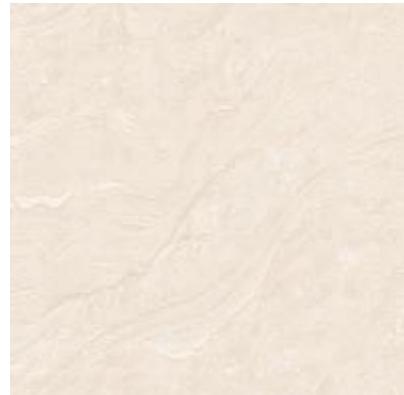

THUNDERSTORM






CICILIA



WOODENZA

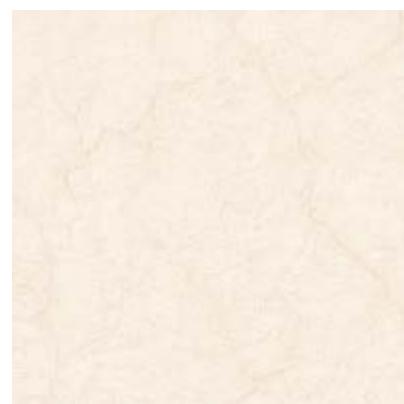

CRACK



TRAVERTINE



12 mm

ULTRATHICK OUTDOOR VITRIFIED TILES

<0.10

WATER ABSORPTION

Features :



HIGHER
THICKNESS



WATER ABSORPTION
<0.10%



RECTIFIED



RESISTANT TO
STAINS



ANTISLIP



HIGHLY UV
RESISTANT



RESISTANT TO
SCRATCHES



EASY TO
CLEAN



FROST
RESISTANCE



RESISTANCE TO
HIGH TEMPERATURES



HEAVY LOAD
BEARING



HIGH MECHANICAL
RESISTANCE

Application Areas :



PATHS AND
WALKWAYS



SWIMMING POOLS
AND ADJACENT
AREAS



TERRACES



PARKING AREAS,
TRANSITABLE
AREAS



BEACH
ESTABLISHMENTS



PUBLIC PARKS
AND GARDENS



STREET
FURNISHINGS



INDUSTRIAL
AREAS

Duratech XT

600x600 MM

Aesthetic and Functional

One of the most important conditions to create aesthetic and functional space is to choose materials suitable for the space. In particular, floors that are the mostly commonly used parts of the outdoor spaces are an important factor to ensure that the conditions in the space meet the needs.

Kajaria Duratech XT - Heavy Duty Vitrified Tiles can be safely used in all internal and external spaces that are exposed to high load and pedestrian traffic. They are a flawless blend of elegance and durability. Maintaining all the vital parameters namely surface hardness (Moh), water absorption, breaking strength (Mor), Load Bearing Capacity etc., the application base of Duratech XT series is wider, and its every design is a true reflection of art. They are safely used on Floor area like pedestrian traffic areas, vehicular movement areas, terraces, Seatout areas, balcony, roof sunbathing areas, veranda, seaside, beach, swimming pools, sidewalk, airport, metros, train stations, industrial buildings, parking lots, underpasses, villa gardens, educational buildings etc.

Heavy Duty Outdoor Vitrified Tiles






K 7011



K 7012



K 7013

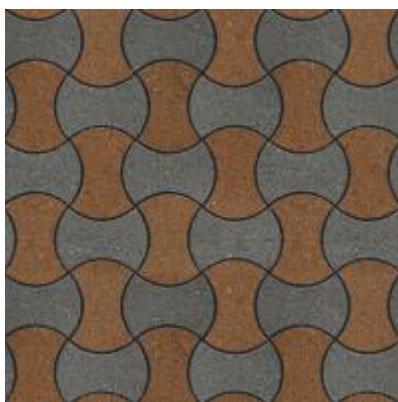

K 7014



K 7015



K 7016

Duratech XT

600x600MM

Heavy Duty Outdoor Vitrified Tiles

Matt




K 7017



K 7018



K 7019

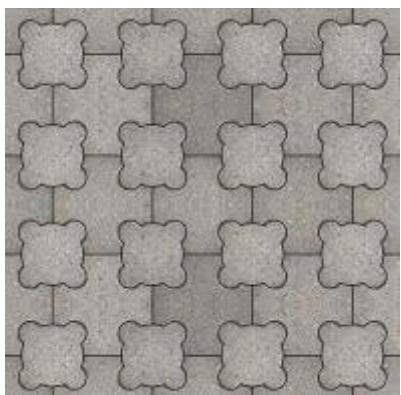


K 7025




K 7026



K 7027

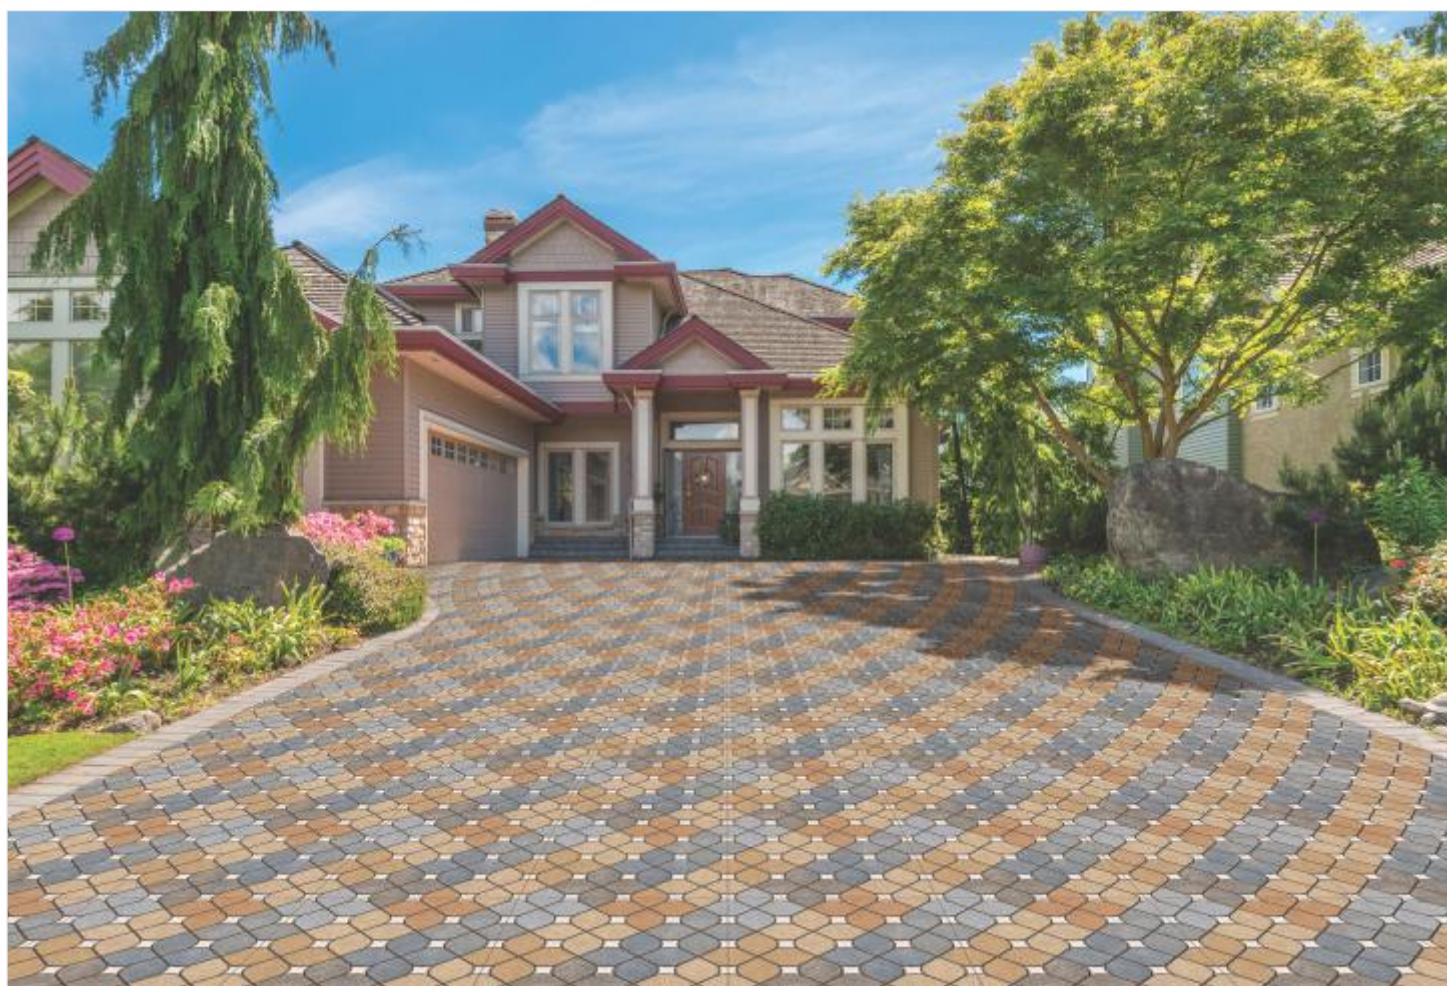

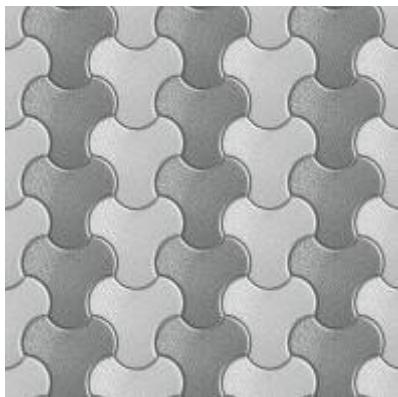

K 7028



K 7032



K 7033



K 7035



K 7036



K 7038

Duratech XT


600x600MM

Heavy Duty Outdoor Vitrified Tiles


Matt



K 7039

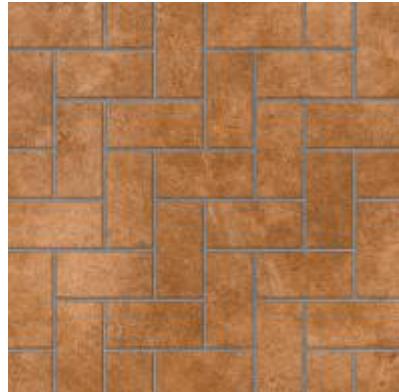


K 7040

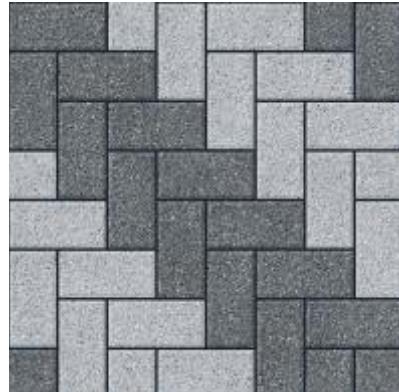

K 7041




K 7042

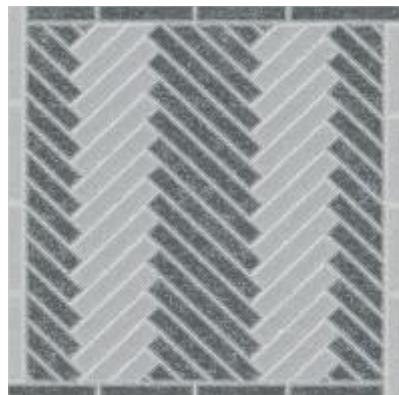

K 7043



K 7044

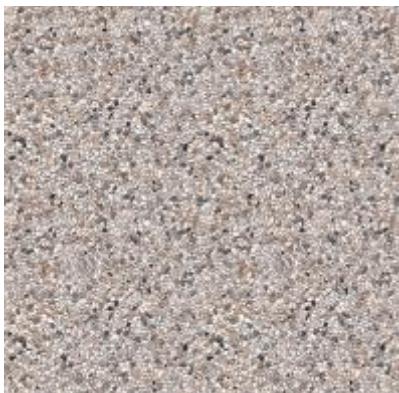

K 7046



K 7047



K 7048



K 7049



K 7050



K 7051

Duratech XT

600x600MM

Heavy Duty Outdoor Vitrified Tiles

Matt



K 7053




K 7054



K 7055




K 7056

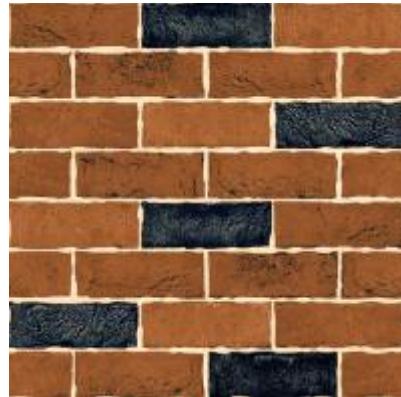

K 7057



K 7058

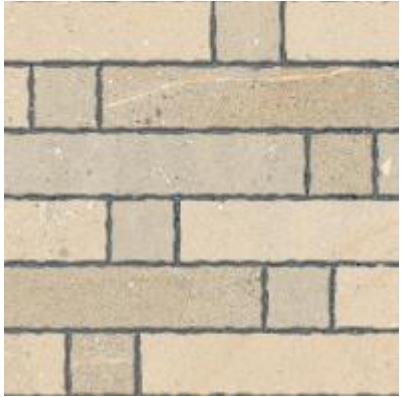


K 7060



K 7061



K 7067

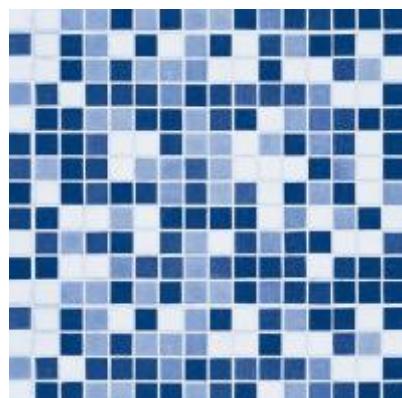

K 7068



K 7070



K 7081

Duratech XT

600x600MM

Heavy Duty Outdoor Vitrified Tiles

Matt



K 7092



K 7093



K 7094



K 7095



K 7099



K 7101





12 mm

ULTRATHICK OUTDOOR VITRIFIED TILES

<0.10

WATER ABSORPTION

Features :



HIGHER THICKNESS



WATER ABSORPTION <0.10%



RECTIFIED



RESISTANT TO STAINS



ANTISLIP



HIGHLY UV RESISTANT



RESISTANT TO SCRATCHES



EASY TO CLEAN



FROST RESISTANCE



RESISTANCE TO HIGH TEMPERATURES



HEAVY LOAD BEARING



HIGH MECHANICAL RESISTANCE

Application Areas :



PATHS AND WALKWAYS



SWIMMING POOLS AND ADJACENT AREAS



TERRACES



PARKING AREAS, TRANSITABLE AREAS



BEACH ESTABLISHMENTS



PUBLIC PARKS AND GARDENS



STREET FURNISHINGS



INDUSTRIAL AREAS

Duratech

400x400 MM

Aesthetic and Functional

One of the most important conditions to create aesthetic and functional space is to choose materials suitable for the space. In particular, floors that are the mostly commonly used parts of the outdoor spaces are an important factor to ensure that the conditions in the space meet the needs.


Kajaria Duratech - Heavy Duty Vitrified Tiles can be safely used in all internal and external spaces that are exposed to high load and pedestrian traffic. They are a flawless blend of elegance and durability. Maintaining all the vital parameters namely surface hardness (Moh), water absorption, breaking strength (Mor), Load Bearing Capacity etc., the application base of Duratech series is wider, and its every design is a true reflection of art. They are safely used on Floor area like pedestrian traffic areas, vehicular movement areas, terraces, Seatout areas, balcony, roof sunbathing areas, veranda, seaside, beach, swimming pools, sidewalk, airport, metros, train stations, industrial buildings, parking lots, underpasses, villa gardens, educational buildings etc.

Heavy Duty Outdoor Vitrified Tiles





4011 A




4012 A



4013 B



4014 B



4016 B



4017 C



4018 C



4019 C



4021 E



4022 E




4023 E



4024 F




4024 F-HL



4025 F



4030 H




4031 H



4032 H



4036 J




4037 J




4038 J



4040 K



4041 L



4043 M




4044 M



4049 P



4050 P



4052 Q



4053 R



4054 R



4055 S



4056 S

Duratech

400x400MM

Heavy Duty Outdoor Vitrified Tiles

Matt



4059 T



4060 U



4061 U



Kajaria






K 4062 V



K 4063 V




K 4064 V



K 4065 V




K 4066 V



K 4067 V




K 4068 V



K 4069 W



K 4070 X



K 4071 Y



K 4072 Z




K 4073 Z - HL




K 4074 Z



K 4075 AA




K 4076 AB



K 4077 AC



K 4078 AC



K 4079 AD




K 4080 AD



K 4081 AE



K 4082 AE



K 4083 AF



K 4084 AG




K 4085 AH



K 4086 AI




K 4087 AJ



K 4088 AK



K 4089 AL




K 4090 AM

Duratech

400x400MM

Heavy Duty Outdoor Vitrified Tiles

Matt



K 4091 AN



K 4092 AO



K 4099 AP



K 4094 AQ



K 4095 AQ



K 4096 AR





4

random moulds

32

random patterns

12

mm thickness

5
 <0.0

water absorption

Features :



HIGHER THICKNESS



WATER ABSORPTION
 $<0.05\%$



RECTIFIED



RESISTANT TO STAINS



ANTISLIP



HIGHLY UV RESISTANT



RESISTANT TO SCRATCHES



EASY TO CLEAN



FROST RESISTANCE



RESISTANCE TO HIGH TEMPERATURES



HEAVY LOAD BEARING



HIGH MECHANICAL RESISTANCE

Application Areas :



PATHS AND WALKWAYS



SWIMMING POOLS AND ADJACENT AREAS



TERRACES



PARKING AREAS,
TRANSITABLE AREAS



BEACH ESTABLISHMENTS



PUBLIC PARKS AND GARDENS



STREET FURNISHINGS



INDUSTRIAL AREAS

Duratech

300x600 MM

1st Time in India

Our Duratech 30x60 cm Collection's Rustic Matt Finish gives easy solutions to urban areas and heavy traffic places. The best Heavy Duty Vitrified tile with 12 mm thickness and an antiskid rate R10. These tiles are highly resistant against abrasion, as well as a strong bending resistance. It is perfect for pedestrian areas, squares in the city, traffic areas, entrance of houses, urban area and all kind of heavy duty areas.

Heavy Duty Vitrified Tiles





K-MJD 3601

4 RANDOM MOULDS



K-MJD 3602



4 RANDOM MOULDS



K-MJD 3603



4 RANDOM MOULDS

Kajaria



Duratech

300x600MM

Heavy Duty Vitrified Tiles


MOHENJO-DARO

Rustic Matt



K-MJD 3604

4 RANDOM MOULDS

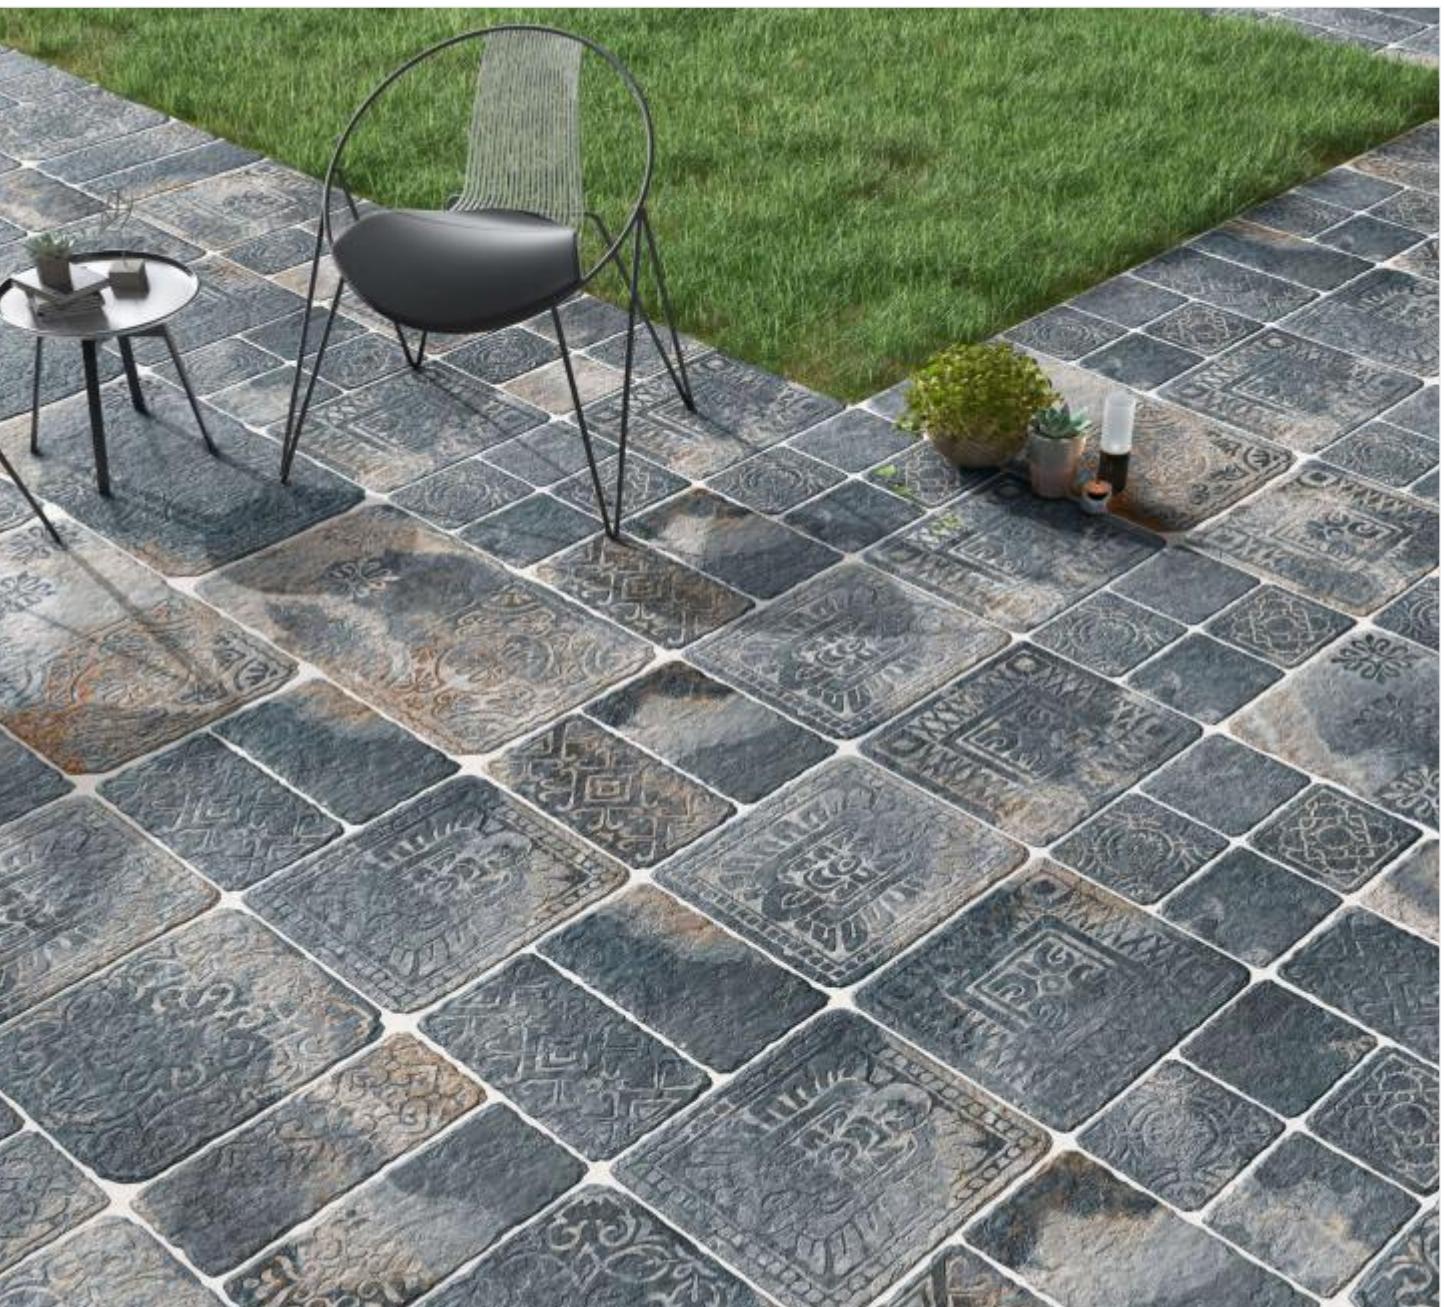



K-MJD 3605

4 RANDOM MOULDS



K-MJD 3606

4 RANDOM MOULDS



K-MJD 3607

4 RANDOM MOULDS

Duratech

300x600MM

Heavy Duty Vitrified Tiles

MOHENJO-DARO

Rustic Matt



K-MJD 3608

4 RANDOM MOULDS



K-MJD 3609

4 RANDOM MOULDS





K-MJD 3610

4 RANDOM MOULDS



K-MJD 3611

4 RANDOM MOULDS

Kajaria



MOHENJO-DARO

K-MJD 3612

4 RANDOM MOULDS



K-MJD 3613

4 RANDOM MOULDS



K-MJD 3614

4 RANDOM MOULDS



K-IND 3625

4 RANDOM MOULDS



K-IND 3626

4 RANDOM MOULDS



K-IND 3627

4 RANDOM MOULDS

Kajaria



INDUS-VALLEY

K-IND 3628

4 RANDOM MOULDS



K-IND 3629

4 RANDOM MOULDS



K-IND 3630

4 RANDOM MOULDS

Duratech

300x600MM

Heavy Duty Vitrified Tiles

INDUS-VALLEY

Rustic Matt



K-IND 3631

4 RANDOM MOULDS



K-IND 3632

4 RANDOM MOULDS



Kajaria



INDUS-VALLEY

K-IND 3633

4 RANDOM MOULDS



K-IND 3634

4 RANDOM MOULDS



K-IND 3635

4 RANDOM MOULDS



DEPTH UP TO
05mm



THICKNESS
9.3 mm



WATER
RESISTANCE

Duratech Cladding




Exploring World's Best Collection

The Kajaria's collection carefully addresses the aesthetic and functional requirements of contemporary architecture by creating unique, coherent and personalised settings.

The particular size 30x45cm and the rectified edges create walls characterized by a tunning visual continuity, which makes the vibrant colors and the effect of these brilliant ceramic surfaces even more precious. The typical vibrant veins found in this resistant stone transmit a unique character to the decoration.

High Depth Cladding Tiles



Duratech Cladding

300x450MM

High Depth Cladding Tiles

Rustic-Matt



K 34001-A



K 34002-A



K 34003-A



K 34004-B




K 34005-B



K 34005-B HL



K 34006-B

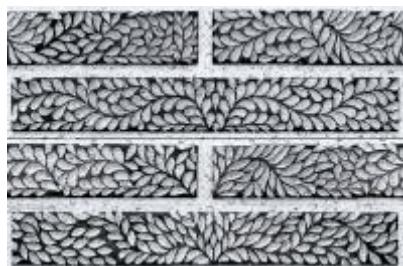

K 34007-B



Duratech Cladding

300x450MM

High Depth Cladding Tiles


Rustic-Matt



K 34008-C



K 34009-C

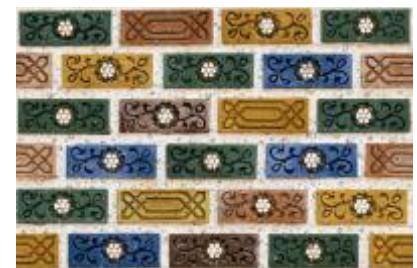

K 34010-C



K 34011-C




K 34012-D



K 34013-D



K 34014-D

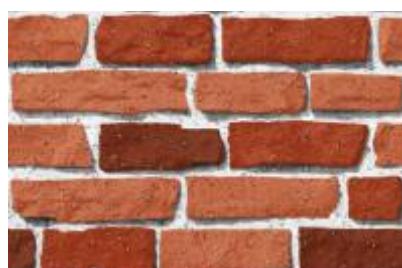

K 34015-D



K 34016-E



K 34017-E



K 34018-F

Duratech Cladding

300x450MM

High Depth Cladding Tiles


Rustic-Matt



K 34019-G



K 34020-G

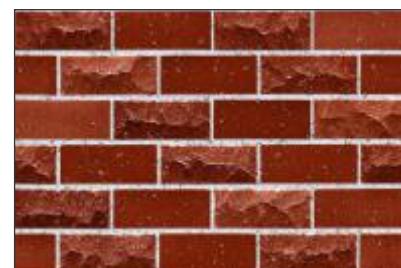

K 34021-G



K 34022-H



K 34023-H



K 34024-H



K 34025-I



K 34026-I



K 34027-I



K 34028-I



K 34029-J



K 34030-J



K 34031-J

Kajaria



Duratech Cladding

300x450MM

High Depth Cladding Tiles

Rustic-Matt



K 34032-K



K 34033-K



K 34034-K



K 34035-L



K 34036-L



K 34037-M



K 34038-M



K 34039-M





K 34040-N



K 34041-N



K 34042-N



K 34043-O



K 34044-O




K 34045-P



K 34045-P HL



K 34046-P

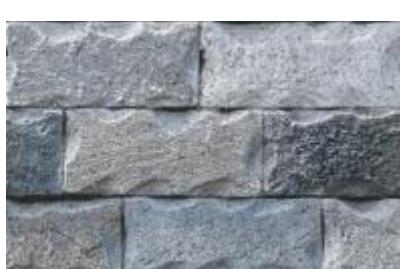

K 34047-P



K 34048-P

Kajaria



Duratech Cladding


300x450MM

High Depth Cladding Tiles

Rustic-Matt



K 34049-Q

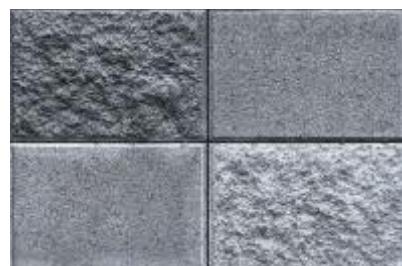

K 34050-Q



K 34051-Q



K 34052-Q



K 34053-R



K 34054-R



K 34055-R



K 34056-S




K 34057-S



K 34058-S



K 34059-T

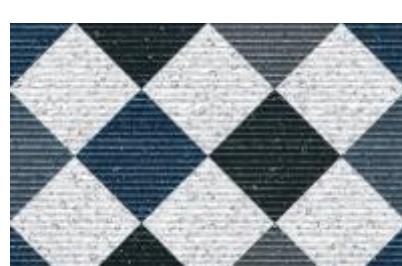

K 34060-T



K 34061-T



TECHNICAL SPECIFICATION 300x600MM / 12MM DURATECH

S.No.	PROPERTY	GROUP BIA - ISO 13006/EN-176	GROUP BIA IS :15622:2017	OUR VALUE	TEST ACCORDING TO
Dimensions & surface Quality					
1.	Deviation in length and width	± 0.6%	± 0.1%	± 0.1%	ISO 10545.2/IS:13630 (P-1)
2.	Deviation in thickness	± 5%	± 5%	± 4%	ISO 10545.2/IS:13630 (P-1)
3.	Deviation in Straightness of sides	± 0.5%	± 0.1%	± 0.1%	ISO 10545.2/IS:13630 (P-1)
4.	Deviation in Rectangularity	± 0.5%	± 0.1%	± 0.1%	ISO 10545.2/IS:13630 (P-1)
5.	Deviation in Surface Flatness	± 0.5%	± 0.5%	± 0.2%	ISO 10545.2/IS:13630 (P-1)
6.	Surface Quality (%)	Minimum 95%	Minimum 95%	No visible defects	ISO 10545.2/IS:13630 (P-1)
Physical characteristics					
7.	Scratch Hardness of surface Moh's scale	Required	Min. 5	7	EN-101/IS:13630 (P-13)
8	Water absorption	≤0.5%	Averages 0.08. Individual maximum 0.1%	<0.1%	ISO 10545.3/IS: 13630 (P-2)
9	Moisture Expansion, in mm/m	Nil	0.02, Max	Nil	ISO 10545.10
10	Surface Abrasion Resistance	As per Mfg.	Min Class 2	Min. Class-4	ISO 10545.7
Mechanical characteristics					
11	Breaking strength	1300 N	Min 1300 N	>2200N	ISO 10545.4/IS: 13630 (P-6)
12	Modulus of rupture	>35 N/mm ²	Average 35. Individual minimum 32	≥40 N/mm ²	ISO 10545.4/IS: 13630 (P-6)
13	Impact resistance	Declared by manufacturer	0.55, Min	Min. 0.55	ISO 10545.5/IS:13630 (P-14)
Safety characteristics					
14	Density	Required	Min 2.20 gm/cc	2.30 gm/cc	DIN 51082/IS: 13630 (P-2)
15	Skid resistance (Friction coefficient)	≥0.4	-	≥0.5	ISO 10545.17
Thermal photo characteristics					
16	Thermal shock resistance	Resistant to 10 cycles	Min 10 cycles	Pass min 10 cycles	ISO 10545.9/IS: 13630 (P-5)
17	Co efficient of thermal expansion	9×10 ⁻⁶ K ⁻¹ Max	6×10 ⁻⁶ K ⁻¹ Max	<6×10 ⁻⁶ K ⁻¹ Max	ISO 10545.8/IS:13630 (P-4)
18	Frost resistance	Resistant	Required	Resistant	ISO 10545.12/IS: 13630 (P-10)
19	Crazing Resistance	As per Mfg.	-	Min 10 cycles	ISO 10545.11
Chemical characteristics					
20	Stain Resistance	Min class-3	Required	Min conform to class-4*	ISO 10545.14
21	Chemical Resistance HOUSE HOLD CHEMICAL & SWIMMING POOL SALT	min class-UB	Required	Conform to classes-U*	ISO 10545.13/IS:13630 (P-7)
22	Chemical Resistance LOW CONCENTRATIONS ACID & ALKALIES	min class-ULB	Required	Conform to classes-UL*	ISO 10545.13/IS:13630 (P-7)
23	Chemical Resistance HIGH CONCENTRATIONS ACID & ALKALIES	min class-UHB	Required	Conform to classes-UHA*	ISO 10545.13/IS:13630 (P-7)

PACKING DETAILS

DIMENSIONS (MM)	NO. OF TILES / BOX	COVERAGE AREA
300x600	4 Pcs.	0.72 sqm.

* Vitrified tiles have resistance to most of the stains/chemicals but, it is recommended to take due care while laying and for day-to-day maintenance.

* Resistance to acids & alkalies (Exception Hydrofluoric Acids & its Compounds)



TECHNICAL SPECIFICATION DURATECH 300X450MM | 10MM (HIGH DEPTH CLADDING TILES)

S.No.	CHARACTERISTIC	GROUP BIB : ISO 13006 - 2018	GROUP BIB IS : 15622:2017	KAJARIA VITRO VALUE	TEST ACCORDING TO
Dimensions & surface Quality					
1.	Deviation in length and width	± 0.3%	± 0.1%	± 0.1%	ISO 10545.2/IS:13630 (P-1)
2.	Deviation in thickness	± 5%	± 5%	± 4%	ISO 10545.2/IS:13630 (P-1)
3.	Deviation in Straightness of sides	± 0.3%	± 0.1%	± 0.1%	ISO 10545.2/IS:13630 (P-1)
4.	Deviation in Rectangularity	± 0.3%	± 0.1%	± 0.1%	ISO 10545.2/IS:13630 (P-1)
5.	Deviation in Surface Flatness	± 0.4%	± 0.50%	± 0.3%	ISO 10545.2/IS:13630 (P-1)
6.	Surface Quality (%)	Minimum 95%	Minimum 95%	No visible defects	ISO 10545.2/IS:13630 (P-1)
7.	Glossiness with Nano	Declared by manufacturer		Avg. 5	ISO 2813 (Glossy meter)
Physical characteristics					
8.	Scratch Hardness of surface Moh's scale	Required	Min. 5	Min. 6	IS:13630 (P-13)
9.	Water absorption	0.5% < Ev ≤ 3% Individual maximum 3.3%	Avg 0.08% < E ≤ 3% Individual maximum 3.3%	Avg 1%	ISO 10545.3/IS: 13630 (P-2)
10.	Moisture Expansion	Test method available	Max 0.02 mm/m	Max 0.01 mm/m	ISO 10545.10 / IS:13630(P-3)
11.	Surface abrasion	Required	Min Class - 2	PASS : CLASS - 4	ISO 10545.7/IS:13630 (P-11)
Mechanical characteristics					
12.	Breaking strength	> 1100 N	Min 1100 N	≥ 1500 N	ISO 10545.4/IS: 13630 (P-6)
13.	Modulus of rupture	>30 N/mm ²	Average 30.Individual minimum 27N	≥ 38 N/mm ²	ISO 10545.4/IS: 13630 (P-6)
Safety characteristics					
14.	Impact resistance (Coefficient of restitution)	Test method available	Min 0.55	> 0.55	ISO 10545.5/IS: 13630 (P-14)
Thermo photo characteristics					
15.	Thermal shock resistance	Test method available	Min 10 cycles	Pass min 10 cycles	ISO 10545.9/IS: 13630 (P-5)
16.	Co efficient of thermal expansion	Test method available	7×10 ⁻⁶ Max	<6×10 ⁻⁶	ISO 10545.8/IS:13630 (P-4)
17.	Crazing Resistance	Required	4 Cycle Pass	PASS : 5 cycle	ISO 10545.11/IS:13630 (P-9)
18.	Frost resistance	Required	Required	No Damage	ISO 10545.12/IS: 13630 (P-10)
19.	Small colour differences	Plain coloured tiles only where required ΔE cmc < 0.25	-	No differences	ISO 10545.16
Chemical characteristics characteristics					
20.	Stain Resistance	Min Class - 3	Min class - 1	Min conform to class-4'	ISO 10545.14/IS13630 (P-8)
21.	Chemical Resistance HOUSE HOLD CHEMICAL & SWIMMING POOL SALT	Min class-GB	Class - AA	Conform to classes-GA'	ISO 10545.13/IS13630 (P-8)
22.	Chemical Resistance LOW CONCENTRATIONS ACID & ALKALIES	Manufacturer is to state classification	Required	Conform to classes-GLA'	ISO 10545.13/IS13630 (P-8)
23.	Chemical Resistance HIGH CONCENTRATIONS ACID & ALKALIES	Test method available	Required	Conform to classes-GHB'	ISO 10545.13/IS13630 (P-8)

PACKING DETAILS

DIMENSIONS & THICKNESS (MM)	NO.OF TILES / BOX	SURFACE	COVERAGE AREA	BOX WEIGHT
300x450mm 10mm	5 Pcs.	Matt	0.675 sqm	12.5 kg (Avg)

* KAJARIA DURATECH CLADDING TILES have resistance to most of the stains/chemicals but it is recommended to take due care while laying and for day-to-day maintenance.

* Resistance to acids & alkalies (Exception Hydrofluoric acids & its Compounds)

* Colours in the catalogue are as accurate as printing process allows. Please check actual sample before making the final selection

* Sizes mentioned in the catalogue are nominal sizes only.

* No claim will be entertained once the KAJARIA DURATECH CLADDING TILES are fixed.

* For better laying, Please follow the instructions on the packaging box.

* Please make sure to check the shade/finish with the sales agent/ dealer making the final purchase because there might be variation in actual finish that shown in the catalogue. The company will not bear any loss in such case.



TECHNICAL SPECIFICATION 600x600MM | 400X400MM / 12MM DURATECH

S.No.	PROPERTY	GROUP BIA - ISO 13006/EN-176	GROUP BIA IS :15622:2017	OUR VALUE	TEST ACCORDING TO
Dimensions & surface Quality					
1.	Deviation in length and width	± 0.6%	± 0.1%	± 0.1%	ISO 10545-2/IS:13630 (P-1)
2.	Deviation in thickness	± 5%	± 5%	± 4%	ISO 10545-2/IS:13630 (P-1)
3.	Deviation in Straightness of sides	± 0.5%	± 0.1%	± 0.1%	ISO 10545-2/IS:13630 (P-1)
4.	Deviation in Rectangularity	± 0.5%	± 0.1%	± 0.1%	ISO 10545-2/IS:13630 (P-1)
5.	Deviation in Surface Flatness	± 0.5%	± 0.5%	± 0.2%	ISO 10545-2/IS:13630 (P-1)
6.	Surface Quality (%)	Minimum 95%	Minimum 95%	No visible defects	ISO 10545-2/IS:13630 (P-1)
Physical characteristics					
7.	Scratch Hardness of surface Moh's scale	Required	Min. 5	6	EN-101/IS:13630 (P-13)
8.	Water absorption	≤0.5%	Averages 0.08, Individual maximum 0.1%	<0.1%	ISO 10545-3/IS: 13630 (P-2)
9.	Moisture Expansion, in mm/m	Nil	0.02, Max	Nil	ISO 10545-10
10.	Surface Abrasion Resistance	As per Mfg.	Min Class 2	Min. Class-4	ISO 10545-7
Mechanical characteristics					
11.	Breaking strength	1300 N	Min 1300 N	>3000N	ISO 10545-4/IS: 13630 (P-6)
12.	Modulus of rupture	>35 N/mm ²	Average 35, Individual minimum 32	≥40 N/mm ²	ISO 10545-4/IS: 13630 (P-6)
13.	Impact resistance	Declared by manufacturer	0.55, Min	Min. 0.55	ISO 10545-5/IS:13630 (P-14)
Safety characteristics					
14.	Density	Required	Min 2.20 gm/cc	2.30 gm/cc	DIN 51082/IS: 13630 (P-2)
15.	Skid resistance (Friction coefficient)	≥0.4	-	≥0.5	ISO 10545-17
Thermo photo characteristics					
16.	Thermal shock resistance	Resistant to 10 cycles	Min 10 cycles	Pass min 10 cycles	ISO 10545-9/IS: 13630 (P-5)
17.	Co efficient of thermal expansion	9×10 ⁻⁵ K ⁻¹ Max	6×10 ⁻⁵ K ⁻¹ Max	<6×10 ⁻⁵ K ⁻¹ Max	ISO 10545-8/IS:13630 (P-4)
18.	Frost resistance	Resistant	Required	Resistant	ISO 10545-12/IS: 13630 (P-10)
19.	Crazing Resistance	As per Mfg.	-	Min 10 cycles	ISO 10545-11
Chemical characteristics characteristics					
20.	Stain Resistance	Min class-3	Required	Min conform to class-4*	ISO 10545-14
21.	Chemical Resistance HOUSE HOLD CHEMICAL & SWIMMING POOL SALT	min class-UB	Required	Conform to classes-UA*	ISO 10545-13/IS:13630 (P-7)
22.	Chemical Resistance LOW CONCENTRATIONS ACID & ALKALIES	min class-ULB	Required	Conform to classes-ULA*	ISO 10545-13/IS:13630 (P-7)
23.	Chemical Resistance HIGH CONCENTRATIONS ACID & ALKALIES	min class-UHB	Required	Conform to classes-UHA*	ISO 10545-13/IS:13630 (P-7)

PACKING DETAILS

DIMENSIONS (MM)	NO. OF TILES / BOX	COVERAGE AREA
600x600	3 Pcs.	1.08 sqm.
400x400	5 Pcs.	0.80 sqm.

* Vitrified tiles have resistance to most of the stains/chemicals but, it is recommended to take due care while laying and for day-to-day maintenance.

* Resistance to acids & alkalies (Exception Hydrofluoric Acids & its Compounds)



Technical Specification POLISHED VITRIFIED TILES (1000x1000 Solitaire Plus)

S. No.	PROPERTY	GROUP BIA ISO 13006/EN-176	GROUP BIA IS :15622:2017	KAJARIA VITRO VALUE	TEST ACCORDING TO
Dimensions & surface Quality					
1.	Deviation in length and width	± 0.6%	± 0.1%	± 0.1%	ISO 10545:2/IS:13630 (P-1)
2.	Deviation in thickness	± 5%	± 5%	± 4%	ISO 10545:2/IS:13630 (P-1)
3.	Deviation in Straightness of sides	± 0.5%	± 0.1%	± 0.1%	ISO 10545:2/IS:13630 (P-1)
4.	Deviation in Rectangularity	± 0.5%	± 0.1%	± 0.1%	ISO 10545:2/IS:13630 (P-1)
5.	Deviation in Surface Flatness	± 0.5%	± 0.5%	± 0.2%	ISO 10545:2/IS:13630 (P-1)
6.	Surface Quality (%)	Minimum 95%	Minimum 95%	No visible defects	ISO 10545:2/IS:13630 (P-1)
7.	Glossiness with Nano	Declared by manufacturer	-	Minimum 90	ISO 2813 (Glossy meter)
Physical characteristics					
8.	Scratch Hardness of surface Moh's scale	Required	Min. 5	Min. 5	EN-101/IS:13630 (P-13)
9.	Water absorption	≤ 0.5%	Averages 0.08, Individual maximum 0.1%	<0.5%	ISO 10545:3/IS: 13630 (P-2)
10.	Moisture Expansion	Nil	0.02, Max	Nil	ISO 10545:10
11.	Deep Abrasion	max 175 mm ²	Max 140 mm ³	≤ 140mm ³	ISO 10545:6/IS:13630 (P-12)
Mechanical characteristics					
12.	Breaking strength	1300 N	Min 1300 N	≥ 3000 N	ISO 10545:4/IS: 13630 (P-6)
13.	Modulus of rupture	>35 N/mm ²	Average 35, Individual minimum 32	≥ 40 N/mm ²	ISO 10545:4/IS: 13630 (P-6)
Safety characteristics					
14.	Density	Required	Min 2.20 gm/cc	2.34 gm/cc	DIN 51082/IS: 13630 (P-2)
15.	Skid resistance (Friction coefficient)	≥ 0.4	-	≥ 0.4	ISO 10545:17
Thermo photo characteristics					
16.	Thermal shock resistance	Resistant to 10 cycles	Min 10 cycles	Pass min 10 cycles	ISO 10545:9/IS: 13630 (P-5)
17.	Co efficient of thermal expansion	9×10 ⁻⁶ K ⁻¹ Max	6×10 ⁻⁶ K ⁻¹ Max	<6×10 ⁻⁶ K ⁻¹ Max	ISO 10545:8/IS:13630 (P-4)
18.	Frost resistance	Resistant	Required	Resistant	ISO 10545:12/IS: 13630 (P-10)
19.	Color Resistance to UV light	Resistant	-	Resistant	DIN 51094
Chemical characteristics					
20.	Stain Resistance	Min class-3	Required	Min conform to class-4*	ISO 10545:14
21.	Chemical Resistance HOUSE HOLD CHEMICAL & SWIMMING POOL SALT	Min class-UB	Required	Conform to classes-U(A)*	ISO 10545:13/IS:13630 (P-7)
22.	Chemical Resistance LOW CONCENTRATIONS ACID & ALKALIES	Min class-ULB	Required	Conform to classes-ULA*	ISO 10545:13/IS:13630 (P-7)
23.	Chemical Resistance HIGH CONCENTRATIONS ACID & ALKALIES	Min class-UHB	Required	Conform to classes-UHA*	ISO 10545:13/IS:13630 (P-7)

TECHNICAL SPECIFICATION - POLISHED VITRIFIED TILES

S. No.	Property	Group B1a - ISO 13006 / EN - 176	Group B1a IS : 15622 : 2017	Our Value	Test According to
Dimensions & surface Quality					
1.	Deviation in length and width	± 0.6%	± 0.1%	± 0.1%	ISO 10545:2/IS:13630 (P-1)
2.	Deviation in thickness	± 5%	± 5%	± 4%	ISO 10545:2/IS:13630 (P-1)
3.	Deviation in Straightness of sides	± 0.5%	± 0.1%	± 0.1%	ISO 10545:2/IS:13630 (P-1)
4.	Deviation in Rectangularity	± 0.5%	± 0.1%	± 0.1%	ISO 10545:2/IS:13630 (P-1)
5.	Deviation in Surface Flatness	± 0.5%	± 0.5%	± 0.2%	ISO 10545:2/IS:13630 (P-1)
6.	Surface Quality (%)	Minimum 95%	Minimum 95%	No visible defects	ISO 10545:2/IS:13630 (P-1)
7.	Glossiness with Nano	Declared by manufacturer	-	Minimum 90%	ISO 2813 (Glossy meter)
Physical characteristics					
8.	Scratch Hardness of surface Moh's scale	Required	Min. 5	Min. 6	EN-101/IS:13630 (P-13)
9.	Water absorption	≤0.5%	Averages 0.08, Individual Maximum, 0.1%	≤0.05%	ISO 10545:3/IS:13630 (P-2)
10.	Moisture Expansion	Nil	0.02, Max	Nil	ISO 10545:10
11.	Deep Abrasion	max 175 mm³	max 140 mm³	≤ 140mm³	ISO 10545:6/IS:13630 (P-12)
Mechanical characteristics					
12.	Breaking strength	1300 N	Min 1300N	≥1700N	ISO 10545:4/IS:13630 (P-6)
13.	Modulus of rupture	≥35 N/mm²	Averages 35 Individual Minimum 32	≥35 N/mm²	ISO 10545:4/IS:13630 (P-6)
Safety characteristics					
14.	Density	Required	Min 2.20 gm/cc	2.34 gm/cc	DIN 51082/IS:13630 (P-2)
15.	Skid resistance (Friction Co efficient)	≥0.4	-	≥0.4	ISO 10545:17
Thermo photo characteristics					
16.	Thermal shock resistance	Resistant to 10 cycles	Min 10 Cycles	Pass min 10 cycles	ISO 10545:9/IS:13630 (P-5)
17.	Coefficient of thermal expansion	9×10⁻⁶K¹Max	6×10⁻⁶K¹Max	<6×10⁻⁶K¹Max	ISO 10545:8/IS:13630 (P-4)
18.	Frost resistance	Resistant	Required	Need to comply with the standard	ISO 10545:12/IS:13630 (P-10)
19.	Color Resistance to UV light	Resistant	-	Resistant	DIN 51094
Chemical characteristics characteristics					
20.	Stain Resistance	Min class-3	Required	Min conform to class-4	ISO 10545:14
21.	Chemical Resistance HOUSE HOLD CHEMICAL & SWIMMING POOL SALT	min class-UB	Required	Conform to classes-UA	ISO 10545:13/IS:13630 (P-7)
22.	Chemical Resistance LOW CONCENTRATIONS ACID & ALKALIES	min class-ULB	Required	Conform to classes-ULA	ISO 10545:13/IS:13630 (P-7)
23.	Chemical Resistance HIGH CONCENTRATIONS ACID & ALKALIES	min class-ULB	Required	Conform to classes-UHA	ISO 10545:13/IS:13630 (P-7)

TECHNICAL SPECIFICATION - STONE ART

S. No.	Property	Group Bla - ISO 13006/EN-176	Group Bla IS :15622:2017	Our Value	Test According to
Dimensions & surface Quality					
1.	Deviation in length and width	± 0.6%	± 0.1%	± 0.1%	ISO 10545:2/IS:13630 (P-1)
2.	Deviation in thickness	± 5%	± 5%	± 4%	ISO 10545:2/IS:13630 (P-1)
3.	Deviation in Straightness of sides	± 0.5%	± 0.1%	± 0.1%	ISO 10545:2/IS:13630 (P-1)
4.	Deviation in Rectangularity	± 0.5%	± 0.1%	± 0.1%	ISO 10545:2/IS:13630 (P-1)
5.	Deviation in Surface Flatness	± 0.5%	± 0.5%	± 0.2%	ISO 10545:2/IS:13630 (P-1)
6.	Surface Quality (%)	Minimum 95%	Minimum 95%	No visible defects	ISO 10545:2/IS:13630 (P-1)
Physical characteristics					
7.	Scratch Hardness of surface Moh's scale	Required	Min. 5	Min. 6	EN-101/IS:13630 (P-13)
8.	Water absorption	≤0.5%	Averages 0.08, Individual maximum, 0.1%	≤0.05%	ISO 10545:3/IS:13630 (P-2)
9.	Moisture Expansion, in mm/m	Nil	0.02, Max	Nil	ISO 10545:10
10.	Deep Abrasion	max 175 mm³	Max 140mm³	≤ 140mm³	ISO 10545:6/IS:13630 (P-12)
Mechanical characteristics					
11.	Breaking strength	1300 N	Min 1300 N	>2000N	ISO 10545:4/IS: 13630 (P-6)
12.	Modulus of rupture	≥35 N/mm²	Average 35, Individual minimum 32	≥40 N/mm²	ISO 10545:4/IS: 13630 (P-6)
Safety characteristics					
13.	Density	Required	2.20 gm/cc	2.34 gm/cc	DIN 51082/IS: 13630 (P-2)
14.	Skid resistance (Friction coefficient)	≥0.4	-	>0.4	ISO 10545:17
Thermo photo characteristics					
15.	Thermal shock resistance	Resistant to 10 cycles	Pass min 10 cycles	Pass min 10 cycles	ISO 10545:9/IS:13630 (P-5)
16.	Coefficient of thermal expansion	9×10⁻⁶K¹Max	<6×10⁻⁶K¹Max	<6×10⁻⁶K¹Max	ISO 10545:8/IS:13630 (P-4)
17.	Frost resistance	Resistant	Required	Resistant	ISO 10545:12/IS: 13630 (P-10)
18.	Color Resistance to UV light	Resistant	-	Resistant	DIN 51094
Chemical characteristics characteristics					
19.	Stain Resistance	Min Class 3	Required	Min conform to class 4	ISO 10545:14
20.	Chemical Resistance HOUSE HOLD CHEMICAL & SWIMMING POOL SALT	min class-UB	Required	Conform to classes-UA	ISO 10545:13/IS:13630 (P-7)
21.	Chemical Resistance LOW CONCENTRATIONS ACID & ALKALIES	min class-ULB	Required	Conform to classes-ULA	ISO 10545:13/IS:13630 (P-7)
22.	Chemical Resistance HIGH CONCENTRATIONS ACID & ALKALIES	min class-ULB	Required	Conform to classes-UHA	ISO 10545:13/IS:13630 (P-7)

TECHNICAL SPECIFICATION - FULL BODY VITRIFIED TILES

S. No.	Property	Group Bla - ISO 13006/EN-176	Group Bla IS : 15622:2017	Our Value	Test According to
	Dimensions & surface Quality				
1.	Deviation in length and width	± 0.6%	± 0.1%	± 0.1%	ISO 10545:2/IS:13630 (P-1)
2.	Deviation in thickness	± 5%	± 5%	± 4%	ISO 10545:2/IS:13630 (P-1)
3.	Deviation in Straightness of sides	± 0.5%	± 0.1%	± 0.1%	ISO 10545:2/IS:13630 (P-1)
4.	Deviation in Rectangularity	± 0.5%	± 0.1%	± 0.1%	ISO 10545:2/IS:13630 (P-1)
5.	Deviation in Surface Flatness	± 0.5%	± 0.5%	± 0.2%	ISO 10545:2/IS:13630 (P-1)
6.	Surface Quality (%)	Minimum 95%	Minimum 95%	No visible defects	ISO 10545:2/IS:13630 (P-1)
	Physical characteristics				
7.	Scratch Hardness of surface Moh's scale	Required	Min. 5	Min. 5	EN-101/IS:13630 (P-13)
8.	Water absorption	≤ 0.5%	Averages 0.08, Individual maximum, 0.1%	≤ 0.05%	ISO 10545:3/IS: 13630 (P-2)
9.	Moisture Expansion	Nil	0.02 Max	Nil	ISO 10545:10
10.	Deep Abrasion	max 175 mm ³	max 140 mm ³	≤ 140 mm ³	ISO 10545:6/IS:13630 (P-12)
	Mechanical characteristics				
11.	Breaking strength	1300 N	Min 1300	≥ 200N	ISO 10545:4/IS: 13630 (P-6)
12.	Modulus of rupture	≥ 35 N/mm ²	Average 35, Individual minimum 32	≥ 35 N/mm ²	ISO 10545:4/IS: 13630 (P-6)
	Safety characteristicsDensity				
13.	Density	Required	Min 2.20 gm/cc	2.34 gm/cc	DIN 51082/IS: 13630 (P-2)
14.	Skid resistance (Friction coefficient)	≥ 0.4	-	≥ 0.4	ISO 10545:17
	Thermo photo characteristics				
15.	Thermal shock resistance	Resistant to 10 cycles	Min 10 cycles	Pass min 10 cycles	ISO 10545:9/IS: 13630 (P-5)
16.	Co efficient of thermal expansion	9×10 ⁻⁶ K ⁻¹ Max	6×10 ⁻⁶ K ⁻¹ Max	<6×10 ⁻⁶ K ⁻¹ Max	ISO 10545:8/IS:13630 (P-4)
17.	Frost resistance	Resistant	Required	Resistant	ISO 10545:12/IS: 13630 (P-10)
18.	Color Resistance to UV light	Resistant	-	Resistant	DIN 51094
	Chemical characteristics characteristics				
19.	Stain Resistance	Min Class 3	Required	Min conform to class 4	ISO 10545:14
20.	Chemical Resistance HOUSE HOLD CHEMICAL & SWIMMING POOL SALT	min class-UB	Required	Conform to classes-UA	ISO 10545:13/IS:13630 (P-7)
21.	Chemical Resistance LOW CONCENTRATIONS ACID & ALKALIES	min class-ULB	Required	Conform to classes-ULA	ISO 10545:13/IS:13630 (P-7)
22.	Chemical Resistance HIGH CONCENTRATIONS ACID & ALKALIES	min class-UHB	Required	Conform to classes-UHA	ISO 10545:13/IS:13630 (P-7)

PACKING DETAILS

S. No.	Dimensions (mm)	No. of tiles / box	Coverage Area
1.	800x1600	2 Pcs.	2.56 Sq. Mtr.
2.	600x1200	2 Pcs.	1.44 Sq. Mtr.
3.	1000x1000	2 Pcs.	2.00 Sq. Mtr.
4.	800x800	3 Pcs.	1.92 Sq. Mtr.
5.	600x600	4 Pcs.	1.44 Sq. Mtr.
6.	Stone Art 600x600	4 Pcs.	1.44 Sq. Mtr.

* Vitrified tiles have resistance to most of the stains/chemicals but,it is recommended to take due care while laying and for day-to-day maintenance.
Resistance to acids & alkalies (Exception Hydrofluoric Acids & its Compounds)

1. Colours in the catalog are as accurate as printing process allows
2. Sizes mentioned in the catalog are the nominal sizes only.
3. Conforming to ISO requirements, technical specifications for Kajaria tiles are applicable only for 1st quality tiles.
4. Please inspect all tiles prior to installation; company will not entertain complaints, once tiles are laid / fixed.
5. For better laying, please follow the instructions on the packaging box.

NORTH**CHANDIGARH**

SCO- 45-46-47, first floor, sector-17A,
opp. Taj Hotel, Chandigarh-160017
Phone : 0172- 4631419 / 16
Mobile : 9501001163

DEHRADUN

International Trade Tower, 1 Old Survey Road,
Adjoining Rajpur Road., Near Cross Road Mall
Dehradun - 248001, Uttarakhand
Mobile : 97600 40499

JAIPUR

First Floor, Nidhi Kamal Tower, Plot No 37-38 B,
Barwara House, Ajmer Road, Jaipur - 302006, Rajasthan
Phone : 0141-3568640
Mobile : 99290 22124

LUDHIANA

Upper Ground Floor, Sandhu Tower-2,
Gurdev Nagar, Ferozpur Road, Ludhiana - 141001, Punjab
Phone : +91-161-4062909
Mobile : 9779021257

LUCKNOW

529 GHA/06, Kanchana Bihari Marg,
Near Jagrani Hospital, Ring Road
Lucknow - 226016 (U.P.)
Mobile : 9793299660, 8128243886

EAST**KOLKATA (Regional office)**

Tirupati Plaza, 2nd Floor, 74/2, A.J.C.Bose Road,
Opp to Jora Girja,
Kolkata - 700 016 (West Bengal)
Mobile: 9007011023

PATNA (Regional office)

'ANCHAL', House No - 15, Ground Floor
Justice Narayan Path, Nageswar Colony,
Patna - 800001, Bihar
Mobile: 7781005449

WEST**MUMBAI**

B1-307, BOOMERANG, Chembur Farm Road,
Near Chembur Studio, Off Saki-Vihar Road,
Andheri (E) Mumbai - 400072, (Maharashtra)
Mobile : 9987753947, 9987753948

PUNE

601-A, D.S.K. Gandharv Heights,
Ganesh Khind Road, Shivaji Nagar,
Pune - 411005, (Maharashtra)
Mobile : 9730081546

AHMEDABAD (Regional office)

Office No. 504, City Centre-2, 5th Floor,
Nr. Sukan Mall Cross Road,
Science City Road, Sola, Ahmedabad - 380060
Mobile : 9724340890

CENTRAL**RAIPUR**

1st Floor, Maharaja Plaza, Near Wholesale
Fruit Market, Dhamtari Road, Raipur
Raipur-492001, Chhattisgarh
Mobile : 9755007408

INDORE (Regional office)

S.A. Tower, 1st Floor, 13/3 New Palasia,
Opp. Arya Samaj Building, Indore, 452001
Mobile: 9752593468

SOUTH**BANGALORE**

Farah Icon, 119 First Floor
Opp. New Pass Port Kendra, Lalbagh Road,
Bangalore - 560 027, (Karnataka)
Mobile : 900840 2940, 900840 2922
9008957861

CHENNAI

No.162, Metro Plaza, Anna Salai,
Opp. Spencer Plaza Mall, Chennai - 600 002
Ph: 044-4858 4990 / 4858 4991
Mob: 90030 77099, 9840098877

COCHIN

MN Square, 1st Floor
549/2, Near Gold Souk Grande
NH Bypass, Vytila, Cochin- 19, (Kerala)
Mobile : 9746474732, 9746474733

COIMBATORE

First Floor , No.57, Cowley Brown Road,
R.S Puram, Coimbatore - 641002, (Tamil Nadu)
Mobile : 9003325075

HYDERABAD

Keerthi & Pride Towers, House No. 8-2-120/86/1&2,
3rd Floor, plot No.11 & 12, Road No.2, Banjara Hills
Hyderabad-500034, (Telangana)
Mobile : 9000005385

SALES REPRESENTATIVE**NORTH**

AGRA :
Mobile : 9760045574

ALLAHABAD :
Mobile : 9773983600

BHATINDA :
Mobile : 9501001162

DELHI / FARIDABAD / GURGAON :
Mobile : 9717795123

GORAKHPUR :
Mobile : 8009407878

HALDWANI :
Mobile : 9760098112

JALANDHAR :
Mobile : 9779021261

JAMMU :
Mobile : 9906909300

JODHPUR :
Mobile : 9001094759

KANPUR :
Mobile : 9773983602

GAZIABAD / NOIDA :
Mobile : 9810010240

ROHTAK / HISSAR / REWARI :

Mobile : 9717795118

SHIMLA
Mobile : 9501001163

UDAIPUR :
Mobile : 9001092597

VARANASI :
Mobile : 9794865554

EAST

BIHAR :
Mobile : 7781005449

JHARKHAND :
Mobile : 9938234060

WB/NE
Mobile : 9007372220

ODISHA
Mobile : 9937571222

SOUTH

CALICUT:
Mobile : 9746117422

KANNUR :

Mobile : 9746474736

HUBLI :
Mobile : 9008278672

MADURAI :
Mobile : 9843731240

MANGALORE :
Mobile : 9008402944

SALEM :
Mobile : 9003842142

TRIVANDURM :
Mobile : 9746474735

TRICHY :
Mobile : 9840284411

THRISUR :
Mobile : 9746474734

VIJAYAWADA :
Mobile : 9000302776

VISAKHAPATNAM :
Mobile : 9000005387

TIRUPATI :
Mobile : 9701451286

WEST

AURANGABAD :
Mobile : 8600992618

KOLHAPUR :
Mobile : 8600992617

NASIK :
Mobile : 9730081553

NAGPUR :
Mobile : 7755904583

GOA :
Mobile : 7757032203

SURAT :
Mobile : 9724340890

BARODA :
Mobile : 9205897978

CENTRAL

BILASPUR :
Mobile : 9752598469

JABALPUR :
Mobile : 9752593831

GWALIOR :
Mobile : 9752593834

BHOPAL :
Mobile : 9826812147

NORTH

DELHI

SHUBHAM MARBLE TRADERS

F-47, Gali No. 7, Dhramkante wali gali
Jagatpuri, East Delhi, Delhi-110051
Tel.: 011-22516246, 22417336, 42197056
Mob.: 9717860011

DEHRADOON MARBLE HOUSE

Wz-1390/4, Pankha Road, Near D-Block,
Nangal Raya, West Delhi, Delhi - 110046
Tel.: 011-28522603, 28525799
Mob.: 9810522603 / 9810562594

HARYANA

BANSAL TILES WORLD

Kafka - Shimla Highway, Vill. Abdullapur,
Distt Panchkula, Pinjore, Haryana-134102
Mob.: 9729328944, 9780523868

RAJASTHAN TILES WORLD

Gangwa Road, Tulsi Vihar,
Azad Nagar, Hissar - 125007
Mob.: 9466009300

SARASWATI MARBLE TILES

Jewwali Bazar,Near OBC Bank, Kanodgate,
Rewari, Haryana-123401
Tel.: 01274-221106, 01274-202467
Mob.: 9215506347, 9355178999,
9896215623

YASH TILES & SANITARY HOUSE

Amolik Chowk, Main RoadNeharpar,
Sector - 86, Faridabad, Haryana-121005
Mob.: 9811298669

PUNJAB

A ONE ASHIANA

72, Avtar Nagar, Ferozpur Road,
Near Ayali Chowk, Ludhiana, Punjab - 141001
Tel.: 0161-2802322, Mob.: 9814721934

FAQIR CHAND JI MARBLE HOUSE

Amritsar Road,Landeke, oga,Punjab-142001
Mob.: 9872400621/ 9814153766

JAMMU & KASHMIR

SANITARY N MARBLE HOUSE

NH-1, Harnaag, Anantnag
Jammu & Kashmir-192125
Mob.: 9622643656, 8825056142,
7889363779, 9596122340

RAJASTHAN

AGARWAL BATH SQUARE

Showroom No. 23, New Atish Market,
Mansarovar, Jaipur, Rajasthan-302020
Tel.:0141-6501377, Mob.: 9828213777

PARADISE CORPORATION

144, Sai Residency, Vrindavan Vihar
Opp. Bank of Baroda, DCM Ajmer Road,
Jaipur, Rajasthan-302021
Tel.: 0141-2811155, Mob.: 9983577721

PARADISE CORPORATION(2ND SHOWROOM)

Shop No. 9-10, Pandit Paradise Marriage
Garden,Nagar Nagar, Nr Metro Pillar No.1
Gopalpura Bypass, Jaipur, Rajasthan-302034
Tel.: 0141-2811155, Mob.: 9983577721

SHIVA SANITATION

950, B.K. Kaul Nagar, Near Queen Mary School
Ajmer, Rajasthan - 305001
Mob.: 9829076070, 9829006779

TILES SQUARE

S-1, New Atish Market, Mansarovar,
Jaipur, Rajasthan-302018
Mob.: 9829031805, 9829011939,
9829303201

VINOD TRADING COMPANY

Opp. Shri Krishna Paradise, Lalarpura,
Vaishali Nagar West, Jaipur, Rajasthan-302034
Mob.: 9414040045, 9214040045

VINOD TRADING COMPANY

Fatehpur Road,National Highway,
Sikar, Rajasthan-332001
Tel.:01572-270287
Mob.: 9414040045, 9414032323

UTTAR PRADESH

KALYAN AGENCIES
Bansal Market, Allahabad Road,Opp Avadh
University, Faizabad, Uttar Pradesh-224001
Mob.: 9415047601, 7800800078,
9919660910

UTTARAKHAND

ELEGANT TILES & SANITARY WARE
389, Near Palam Green,Delhi Road,
Roorkee, Uttarakhand-247667
Mob.: 9927855889

WEST

MAHARASHTRA

AARTISTIK
404-406, Maulana Azad Road,
Duncan Road,
Mumbai, Maharashtra-400004
Tel.: 022-23881252, 23881250
Mob.: 9819722445

PRASHANT TRADERS

Plot No. 6, Deo Nagar, Khamala Road,
Nagpur, Maharashtra-440015
Tel.: 0712-3296574, Mob.: 98222 32038

PARAS HOME DECOR

Balapur, Gut No. 155, Opp. Guru Lawns,
Beed Bypass Road, Aurangabad
Maharashtra-431005
Mob.: 9823850739

SUDHAN POLYMERS

D-94, MIDC Area, Near Gopal Dal Mill
Jalgaon, Maharashtra-425003
Tel.: 0257-2210974, 2211974
Mob.: 9823077251, 7507776688

SOUTH

KARNATAKA

SLV CERAMICS
117/1, Doddakannahalli, Opp. Marble Place
Sarjapura Main Road, Carmalaram Post
Bengaluru, Karnataka-560035
Tel.: 080-25741666, 28441666
Mob.: 9886773927

SRI MARUTHI CERAMCIS

#2370,19th cross K. R Road,
Banasankri, 2nd stage
Bengaluru, Karnataka - 560070
Tel.: 080-26771284, Mob.:9900174291

TELANGANA

VIGNESWARA TILES AND SANITATION
Plot No 480, Sri Vijayadurga Nagar,
Bachupally, Hyderabad,Medchal,Malkajgiri,
Telangana-500090
Mob.: 9849666375

CENTRAL

CHHATTISGARH

SHREE RAM MARBLE & TILES
Manendragarh Road,Opp. Holy Cross English School,
Surguja, Ambikapur, Surguja, Chhattisgarh-497001
Tel.: 07774-230191, Mob.: 9009904020

MADHYA PRADESH

SHRI RAM TILES & SANITARY
Opp. Mishra Petrol Pump, Allahabad Road,
Rewa, Madhya Pradesh-486001
Tel.: 07662-325043, 320707, Mob.: 9039707888

VRINDAVAN GRANITE & TILES

Talawali Chanda, A. B. Road, Opposite Anant Toyota,
Dewas Naka, Indore, Madhya Pradesh-453771
Mob.: 70890 62647, 94250 62647

EAST

BIHAR

MUSKAN MARBLE
Dakbanglo Road, Nr. Anwarpur Chowk
Vaishali, Hajipur, Vaishali, Bihar-844101
Tel.: 06224-260780
Mob.: 9473224786, 9835473780

S.V. TILES

Nr. Usha Godown, Beaur Mod Anisabad,
Patna, Bihar-800002
Mob.: 8651519801, 9334157504

S. ROY MARBLE

Kajwali Chak, Near Kotwali Chowk,
Tatarpur Road,Bhagalpur, Bihar-812002
Mob.: 9431498947, 9801066486

ODISHA

R K MARBLES
1061 , Nayapally,In Front Of Iskon Temple
Bhubaneswar, Odisha-751012
Tel.: 0674-2560377, 2560814,
Mob.:9937272057/9437172000

Kajaria

INDIA'S NO. 1 TILE COMPANY

Kajaria Ceramics Limited

Corporate Office: J1/B1 (Extn.), Mohan Co - op Industrial Estate, Mathura Road, New Delhi - 110044, Ph.: +91-11-26946409
Regd Office: SF-11, Second Floor, JMD Regent Plaza, Mehrauli Gurgaon Road, Village Sikanderpur Ghosi, Gurgaon-122001, Haryana, Ph.:+91-0124-4081281
CIN No. : L26924HR1985PLC056150, E-mail: info@kajariaceramics.com, Web.: www.kajariaceramics.com

 facebook.com/KajariaCeramicsLimited  twitter.com/KajariaCeramic, Tollfree : 1800-309-309

Download Kajaria App  